

# RDA

## LIGHTING

### WLR

HPS CFL LED

*The WLR is ideal for security lighting above entry ways, stairwells and pedestrian areas. The clear prismatic lens offers glare free light. Available in High Pressure Sodium and Compact Fluorescent and LED.*

**MOUNTING PLATE** Die cast aluminum with provision for mounting the fixture to a standard octagon box or surface mount and using 1/2" knock out for providing power.

**HOUSING** Made of durable polycarbonate available in Bronze.

**LENS** Made of durable polycarbonate with prismatic pattern that offers glare free light.

**LEDS** Twelve LEDs producing 1032 lumens out of the fixture and 18 watt power consumption. The LEDs are rated for 50,000 hours minimum.

**BALLAST** All High Pressure Sodium ballasts are 120V normal power factor. Compact fluorescent ballasts are 120 - 277 volts electronic rated to -30°C. 120 - 277 volt driver for LED option.

**SOCKET** Medium base 4KV pulse-rated socket with a nickel-plated screw shell and a spring-loaded centre contact for High Pressure Sodium models. White thermo plastic with integral clips for lamp retention for Compact Fluorescent models.



**LAMP** All units come complete with lamp and photocell.

**WATTAGES** 20 watt LED, 70 High Pressure Sodium and 42 watt Compact Fluorescent.

**FINISHES** Bronze

**OPTIONS** Wire cage

**APPROVAL** CULus

[www.rdalighting.com](http://www.rdalighting.com)

## Catalog Code

WLR

LED20, 42CFL, 70HPS

LAMP

120NPF, 120-277\*

VOLTAGE

BRZ

BRZ - BRONZE

FINISH

PC


PC - PHOTOCELL  
WC\*\* - WIRE CAGE

OPTIONS

\* Available for LED, CFL options only.

\*\* Ordered and shipped separately.

## Dimensions

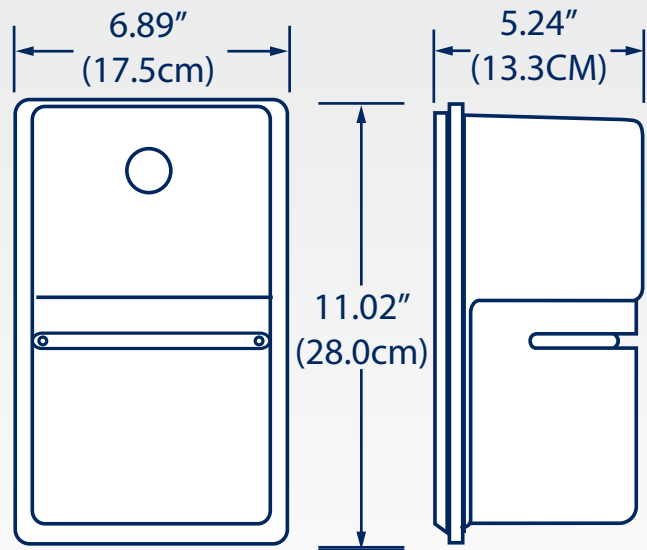

## WIRE CAGE DETAIL

