



## WRD6

MH HPS LED

*The WRD6 is a specification grade wall mounted down light and is slightly smaller than the WRD8. Light sources available are HPS, MH and LED. The bottom lens is removed with a quarter turn for ease of lamp replacement. The fixture also has an easy mounting system with a bracket mounted to the wall and the luminaire clips on and locked in place with two Allen screws. The WRD6 can be used for atrium's, building entrances, columns and perimeter lighting.*

**HOUSING** Extruded aluminum with a powder coat paint finish.

**LENS ASSEMBLY** Die cast aluminum with a black baffle and clear tempered glass lens.

**MOUNTING** Mounts over a standard recessed junction box.

**LED OPTION** one LED array, delivering a minimum of 2000 lumen's from the source.

**OPTICS** Narrow, Medium and Wide for LED option.

**DRIVER** Standard LED unit has a 120-277 volt driver, optional 347 volt is available.



**MH OR HPS OPTION** Available in 50 or 70 watt metal halide or high pressure sodium.

**BALLAST** All ballasts are tri-tap 120/277/347 volt high power factor.

**FINISH** Standard finishes are bronze, black and white. Custom colours are available, please consult factory.

**HARDWARE** Stainless steel

**APPROVAL** Approved to CSA standards

**RATING** IP54

**TESTED IN ACCORDANCE WITH LM-79, LM-80.**

## Catalog Code

WRD6

50HPS, 70HPS, 50MH, 70MH,  
LED

LAMP

NARROW, MEDIUM, WIDE

LED OPTICS

120, 277, 347, 120-277E, 347E

VOLTAGE

WH - WHITE



BLK - BLACK

BRZ - BRONZE

CC - CUSTOM COLOUR

FINISH

## Dimensions

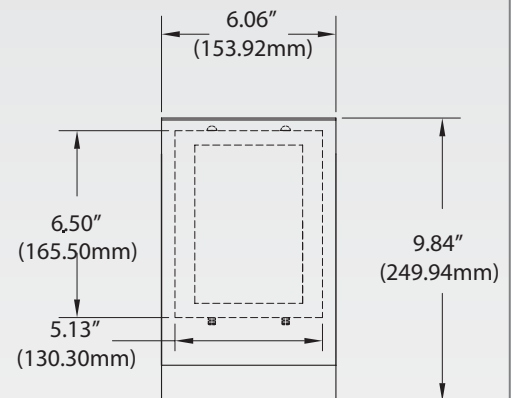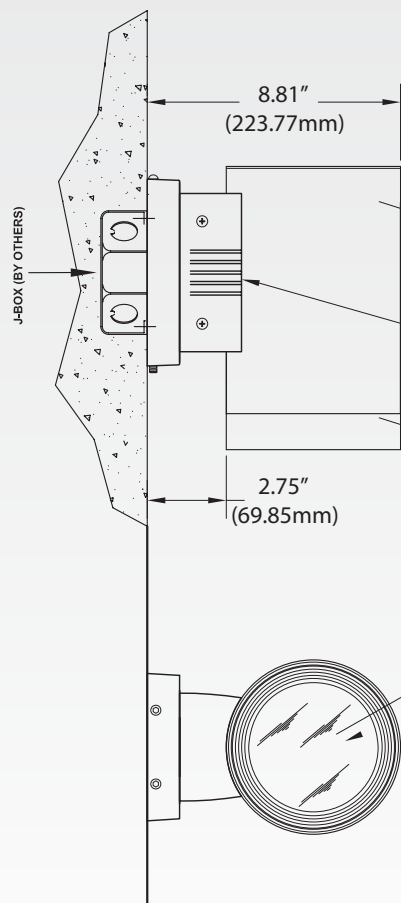

HOUSING: EXTRUDED ALUMINUM.  
PAINTED WITH A DURABLE  
POWDER COAT APPLIED FINISH.

MOUNTING ARM AND WALL PLATE  
ARE MADE OF DIE CAST ALUMINUM.

SILICONE GASKET, PROVIDING A  
WEATHERPROOF SEAL.

LENS: CLEAR TEMPERED GLASS,  
SILICONE SEALED ONTO A ALUMINUM FRAM  
WHICH CAN TWIST OFF FOR EASY ACCESS  
TO LIGHT COMPARTMENT.

IE

NOTE: RATED IP54