



WRD8

MH HPS LED

The WRD8 is a specification grade wall mounted down light and is slightly larger than the WRD6. Light sources available are HPS, MH and LED. The bottom lens is removed with a quarter turn for ease of lamp replacement. The fixture also has an easy mounting system with a bracket mounted to the wall and the luminaire clips on and locked in place with two Allen screws. The WRD8 can be used for atrium's, building entrances, columns and perimeter lighting.

HOUSING Extruded aluminum with a powder coat paint finish.

LENS ASSEMBLY Die cast aluminum with a black baffle and clear tempered glass lens.

MOUNTING Mounts over a standard recessed junction box.

LED OPTION One LED array, delivering a minimum of 4000 lumen's from the source.

OPTICS Narrow, Medium and Wide for LED option.

DRIVER Standard LED unit has a 120-277 volt driver, optional 347 volt is available.



MH OR HPS OPTION Available in 50 or 70 watt metal halide or high pressure sodium.

BALLAST All ballasts are tri-tap 120/277/347 volt high power factor.

FINISH Standard finishes are bronze, black and white. Custom colours are available please consult factory.

HARDWARE Stainless steel

APPROVAL Approved to CSA standards

RATING IP54

TESTED IN ACCORDANCE WITH LM-79, LM-80.

Catalog Code

WRD8

LAMP

50HPS, 70HPS, 50MH, 70MH,
LED

LED OPTICS

NARROW, MEDIUM, WIDE


VOLTAGE

120, 277, 347, 120-277E, 347E

FINISH

WH - WHITE
BLK - BLACK
BRZ - BRONZE
CC - CUSTOM COLOUR

Dimensions

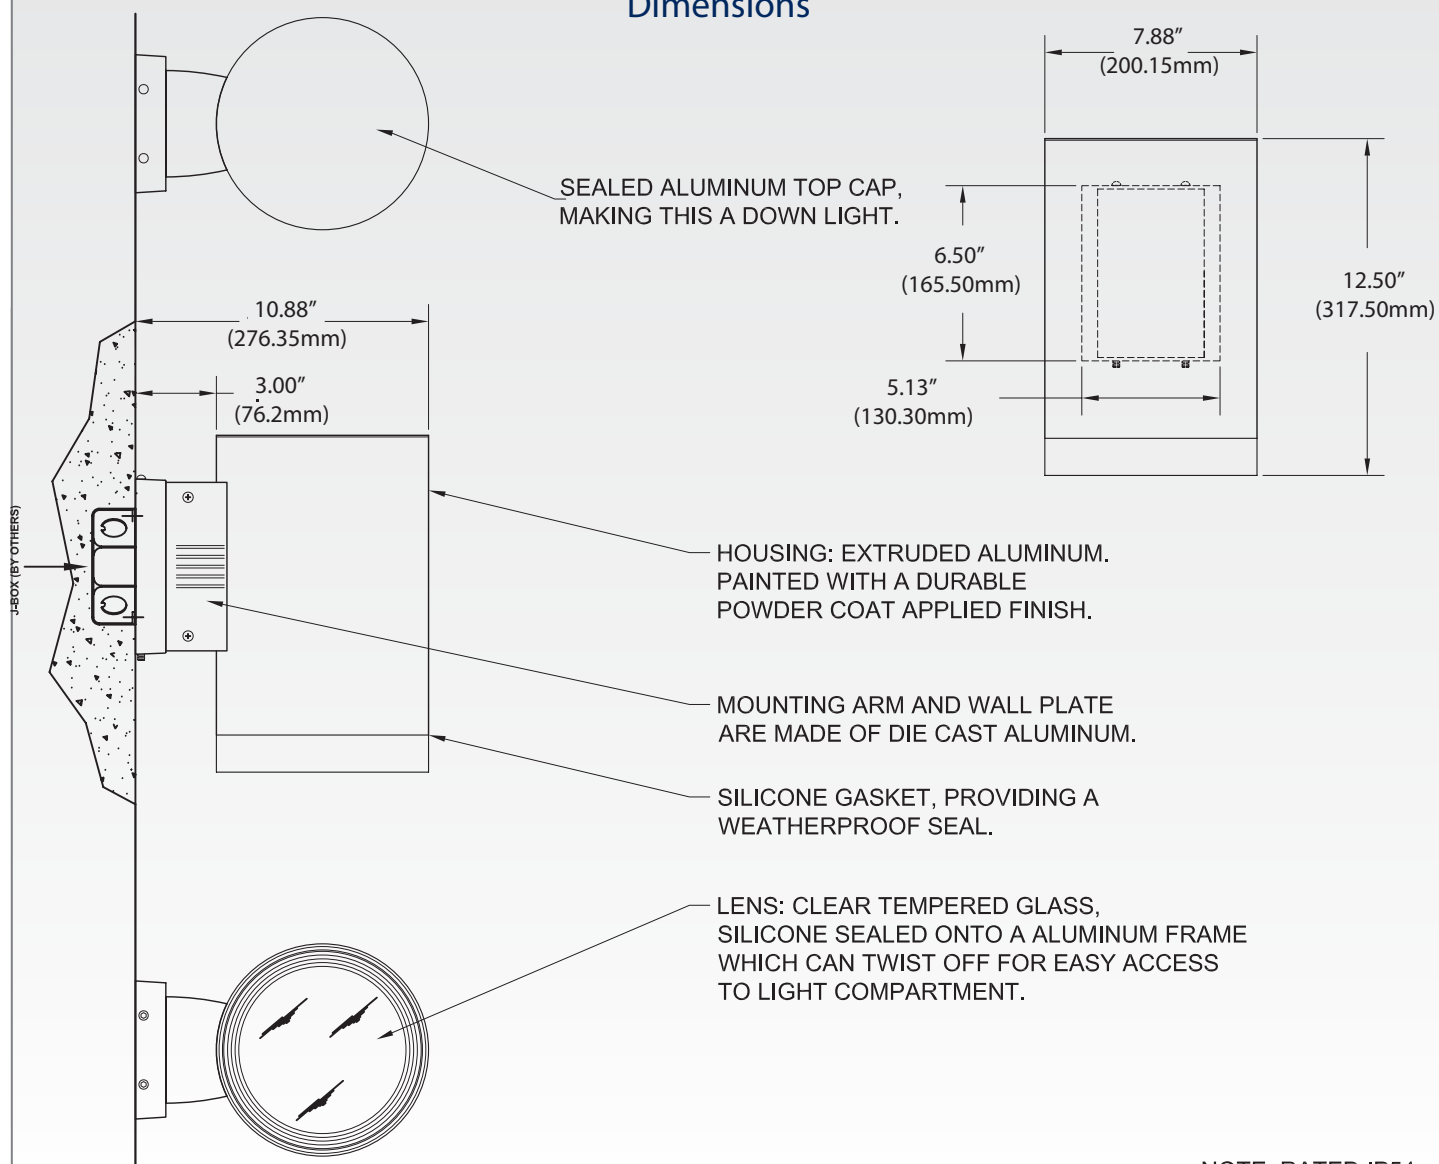

NOTE: RATED IP54

www.rabdesign.ca