

The AWL-LED14 is a wall pack with an adjustable head that can be aimed straight down for dark sky requirements or aimed out to deliver the light where required.



APPLICATIONS

Ideal for use on outdoor walls along perimeters of buildings, townhouses, condominiums, schools.

Project	
Type	
Date	
Notes	

SPECIFICATIONS

Construction

Die cast aluminum housing with tamperproof stainless steel hardware. Clear tempered glass lens with a gasket. There are 4 conduit entries. The unit has a unique hanging hook assembly for easy installation and a leveling bubble on the back box for proper alignment.

LED configuration

The AWL-LED14 has one LED Chip On Board (COB) that delivers a minimum of 1,610 lumens. The LEDs have a colour temperature of 5000K as standard. 3000K and 4000K also available. The LEDs have a CRI of greater than 70 and an operating temperature range of -40°C to +40°C.

Adjustable head

The fixture can be aimed 0° - 90° delivering more lumens on the ground where needed.

Electrical

Total system wattage of the unit is 14W. The standard unit has a high efficiency dimmable driver that operates at 120 - 277V. 347V drivers are also available.

Finish


Standard finish is bronze, black and white. Please consult factory for custom colour.

Accessories

Photocell, frosted lens, On/Off Sensor and 0 - 10V Dimmable Smart Sensor.

Watts	14W
Lumens	min. 1,610 lumens
Efficacy	min. 115 lumens per watt
Operating Temperature	-40°C to +40°C
Certification	cULus, IP65
LED life	100,000 hours
Colour Temperature	5000K (standard) 4000K, 3000K (Option)
Warranty	5 Years

DIMENSIONS

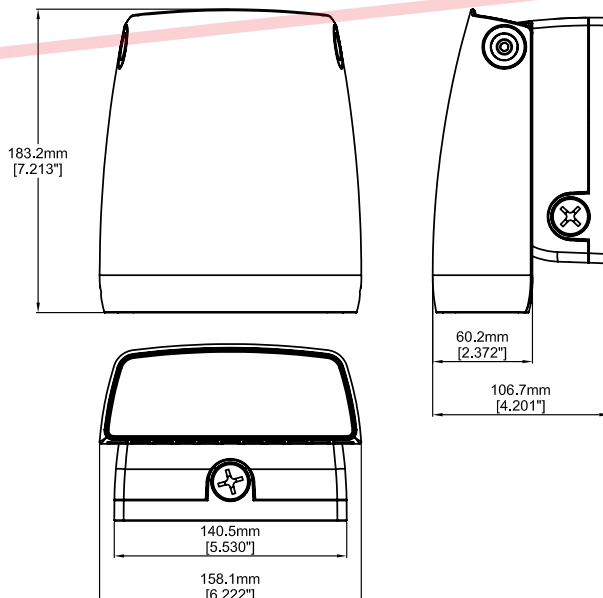


**Shown with
Optional Motion Sensor**




INSTALLATION INFORMATION


1. Open fixture, mount back box to junction box



2. Rest fixture onto hook and connect wires




3. Reattach fixture to back box



ACCESSORIES


MS180DIM 0 - 10V Dimmable Smart Sensor (DMS)

MS180S On/Off Sensor (SMS)

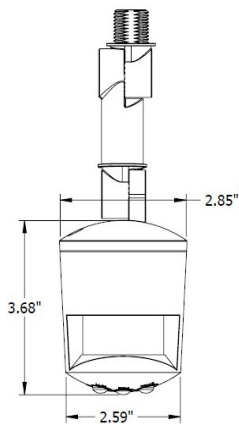

Dimmable Smart Sensor

The MS180DIM is a fully adjustable, dimmable smart sensor that allows you to provide reduced light levels as low as 10% when no motion is detected.

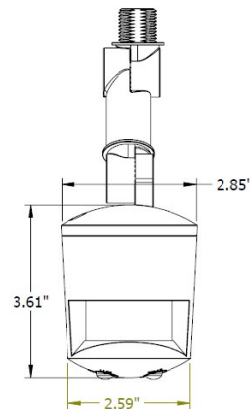

On/Off Sensor

The MS180S is a fully adjustable motion sensor that can be set for dusk to dawn operation or other custom applications.

Features: Dimmable Smart Sensor

- Adjustable light levels ensure fixture is fully on when needed and dimmed or off when not.
- Smart dimming reduces electrical load and heat generated by the fixture resulting in increased fixture life.
- Over 92% energy savings compared to traditional wall packs.
- Sensor has an extension arm with two rotatable joints that allow mounting from the bottom conduit access or the side conduit access of fixture.
- Daylight sensor without smart dimming (MS180S) also available in the same design.

Contact us to learn more.

ORDERING GUIDE

AWL	-	LED14	-		-		-	
			VOLTAGE		COLOUR TEMP		FINISH	
			A - 120V*		5K - 5000K*		BRZ- BRONZE*	
			F - 277V		4K - 4000K		BLK - BLACK	
			C - 347V		3K - 3000K		WHT - WHITE	
							CC - CUSTOM COLOUR	
							OPTIONS	
							DMS - Dimmable Sensor	
							SMS - On/Off Sensor	
							PC - Photocell	

* Standard configuration