

The GFL is a rugged cast aluminum LED flood which delivers 1700 lumens. The fixture has a 1/2" NPT knuckle and comes complete with a round mounting cover plate for standard 4" junction boxes.



APPLICATIONS

Ideal for doorways, entrances, sign and landscape lighting.

Project	
Type	
Date	
Notes	

SPECIFICATIONS

Construction

Precision die cast aluminum with 1/2" NPT locking swivel arm. Housing and arm have a powder coat paint finish. Heat and impact resistant, tempered clear glass lens.

Mounting

The GFL has a 1/2" NPT swivel arm with mounting plate. The fixture can be wall or ceiling mounted. It can also be combined with various arms as a sign light.

Finish

Powder coat paint finish. Standard colour is bronze. Custom colours are available.

LED Configuration

54 LEDs, 2,603 lumens, 5000K.

Electrical

Total system wattage of the unit is 20W. The standard unit has a high efficiency driver that operates at 120-277 volts


Accessories

Wall mounted arms.


Fixture Watts	20W
Lumens	2,603
Efficacy	133 lumens/watt

Rated Life	100,000 hours
Certification	cULus
Colour Temperature	5000K (standard)
Warranty	5 Years
Beam Pattern	NEMA 7Hx7V
Operating Temperature	-40°C to +40°C
CCT	>70
Total Harmonic Distortion	7.42%
Power Factor	0.99

DIMENSIONS

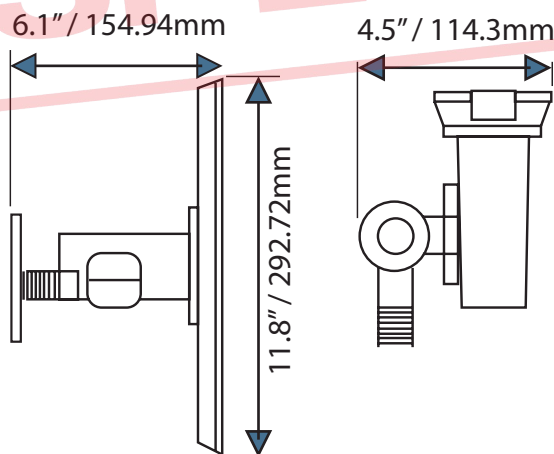

ACCESSORIES

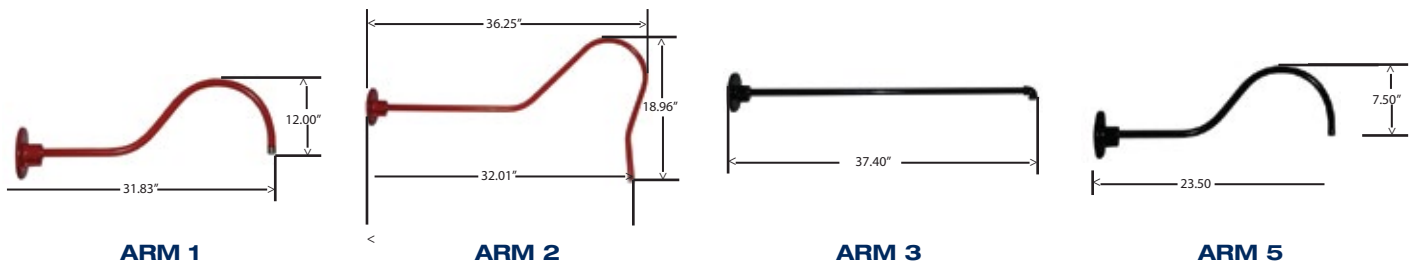

SOLD SEPARATLY

ORDERING GUIDE

GFL	-	LED20	-		-		-	
			VOLTAGE		COLOUR TEMP		FINISH	
			B - 120-277V*		5K - 5000K*		BRZ- BRONZE*	
							CC - CUSTOM FINISH	

* Standard configuration