



RAY8-LED

LED Wall Light



SPECIFICATIONS*

Watts	85
Lumens	4,035
Efficacy	115
Colour Temp	3K, 4K , 5K*
Operating Temp	-40°C to +40°C
Voltage	120-277*, 480V
LED Life	100,000 hours
Housing Material	Extruded Aluminum
Lens Material	Polycarbonate
CRI	>80
Beam Pattern	180°, 240°, 360°



DESCRIPTION

The RAY8-LED bollard is an architectural bollard in a sleek design that provides uniform, glare free illumination. The RAY8 features a 360° adjustable head and various beam configurations ranging from 60° to 360° to illuminate all angles.

APPLICATIONS



Town Houses



Condos



Walkways



Parkettes


FEATURES

- The RAY Series comprises sleek, modern round and square bollards.
- DLC approved for energy rebates.
- Rugged construction – extruded aluminum housing, and cast aluminum base secured with stainless steel screws.
- Patented twist lock mounting system on RAY6/8 for secure and easy installation.

FEATURES



Custom designed
twist lock mechanism.

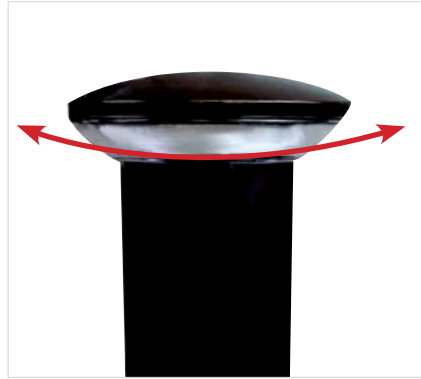


360° Adjustable head.



Various beam configurations.

DIMENSIONS

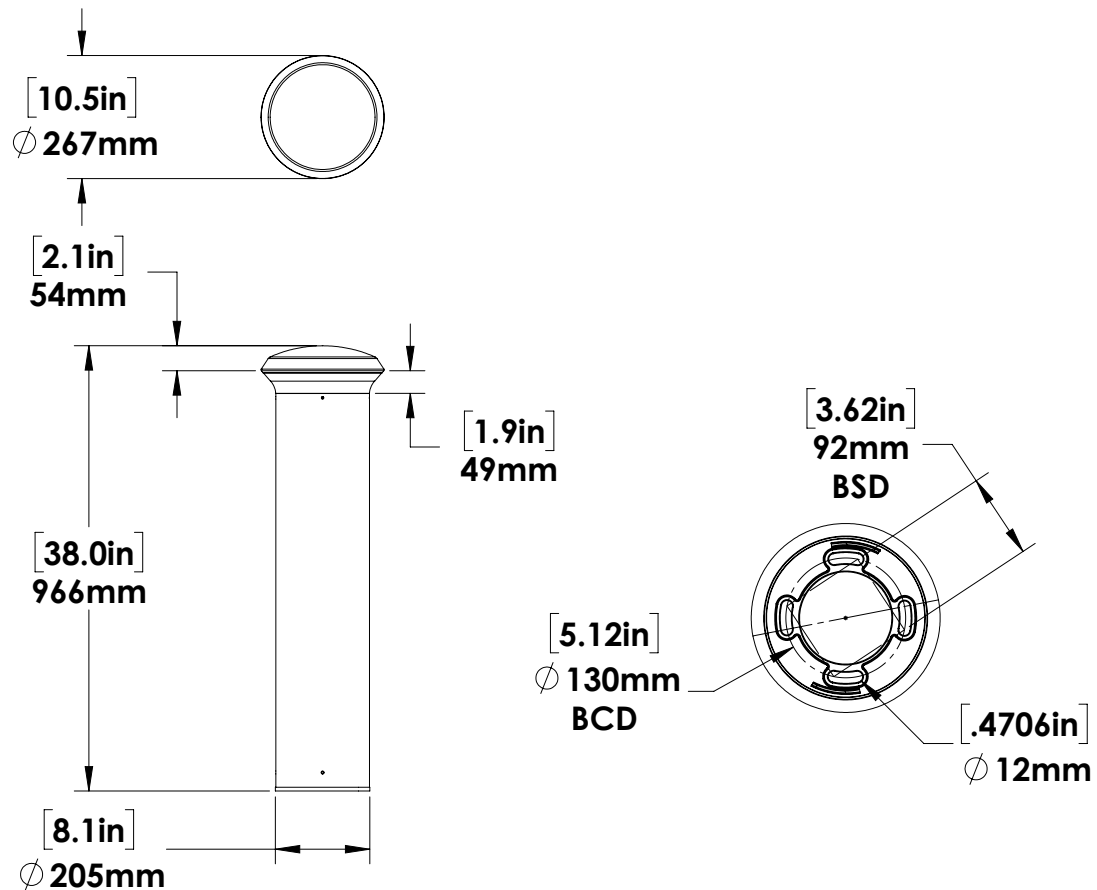

ORDERING GUIDE

RAY8					
WATTS	VOLTAGE	COLOUR TEMP.	LED CONFIGURATION	FINISH	
LED35	B - 120 - 277V*	3K - 3000K	180°	BRZ - BRONZE*	
	L - 480V	4K - 4000K	240°	CC - CUSTOM COLOUR	
		5K - 5000K*	360°		

*Standard Configuration.