

The LED Surface Mount Wrap is a 2' linkable linear fixture ideal for indoor use. The wraparound fixture features an easy to use link connector ideal for combining multiple fixtures in one row.



APPLICATIONS

Ideal for indoor use in stairwells, hallways, foyers, utility areas, corridors, & many more.

Project	
Type	
Date	
Notes	

SPECIFICATIONS

Construction

Housing is made of steel with polycarbonate end caps and a white powder coat paint finish. Flexible link connector allows you to easily combine up to eight linear fixtures in a row. Fixture is suitable for damp locations

LED

The operating temperature of the fixture is -25°C to +55°C. Fixture is ideal for indoor use.

Electrical

Total system wattage of the unit is 27W. The standard unit has a high efficiency driver that operates at 120 V - 277 V.

Mounting

Easy mounting direct on the wall or ceiling. Knockouts are provided for mounting to standard 4" junction boxes.

Easy Wiring and Maintenance

Fixture comes complete with link connector in the box. Clips on either end can be slid off allowing installer to easily remove the lens for ease of wiring and maintenance.

Lens


Standard fixture comes with frosted lens.

Finish


Standard finish is white.

Operating Temperature	-25°C to +55°C
Certification	ETL Listed
LED Life	50,000 hours
Colour Temperature	4000K, 4500K, 5000K
Warranty	5 years
CRI	>80
Power Factor	0.91
Total Harmonic Distortion	9.9%

DIMENSIONS

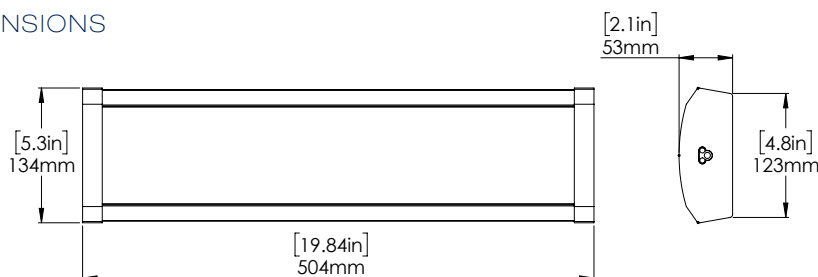

KNOCKOUTS ON BACK OF THE FIXTURE

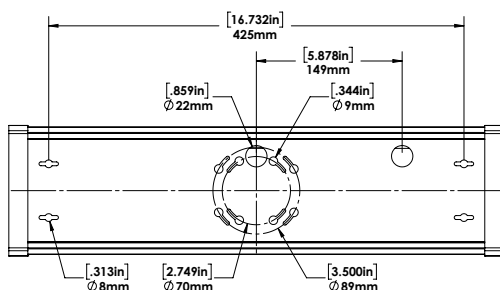


EASY WIRING TAB



Easy Installation

Clips on either end can be slid off allowing installer to easily remove the lens for ease of wiring and maintenance.

LINK CONNECTOR



Link Connector

The easy to use link connector fits into the end of the SMW4-LED fixture and enables you to combine up to eight fixtures in a row

(Fixture comes complete with link connector in the box.)

ACCESSORIES (SOLD SEPARATELY)



CORD & PLUG

5' cord and plug sold separately.



INTERCONNECT


12" white interconnect cable sold separately.

Model No.	Voltage (V)	Wattage (W)	Light Output (lm)	Efficacy (l/w)	THD (%)	PF	CCT	CRI
SMW2D-LED24-B-4K-XXX-XX	120-277	27.0	2877.5	106.3	9.9	0.91	3987	84
SMW2D-LED24-B-4.5K-XXX-XX	120-277	27.0	2877.5	106.3	9.9	0.91	4500	84
SMW2D-LED24-B-5K-XXX-XX	120-277	26.9	2922.4	108.4	9.9	0.91	5164	86.8

ORDERING GUIDE

SMW2D	-	LED24	-	B	-	WHT	-	FR
		VOLTAGE		COLOUR TEMP		FINISH		LENS
		B - 120-277V*		4K- 4000K* 4.5K - 4500K 5K -5000K		WHT - WHITE*		FR - FROSTED LENS*

ACCESSORIES ORDERING GUIDE



**CORD & PLUG - SWM4-LED 5" CORD
AND PLUG WHT**

**INTERCONNECT CABLE - SMW4-LED
12" INTERCONNECT CABLE WHT**

* Standard configuration