



### APPLICATIONS

**Ideal for canopies, covered walkways, building entrances, stairwells, service areas and parking garages.**

Rugged high efficiency square ceiling light with an easy installation feature and control options including high frequency motion sensor and 0 - 10V dimming

Project	
Type	
Date	
Notes	

### SPECIFICATIONS

#### Construction

Housing is made from die cast aluminum and has a prismatic polycarbonate lens for maximum light distribution. The fixture has four conduit entries. Fixture is rated IP65 and suitable for wet locations. The operating temperature range is -40°C to +40°C.

#### Electrical

Total system wattage of the unit is 40W. The standard unit has a high efficiency driver that operates at 120 - 277V. 347V also available as an option.

#### LED Configuration

The 40W unit delivers 4,803 lumens. The LEDs have a colour temperature of 5000K as standard.

#### Easy Installation


Fixture has a sturdy mounting plate made from galvanized steel. This plate is separated from the fixture and mounts to the ceiling. The fixture can be hung from the two hinges that lock into place with set screws. Once in place, it allows the installer to complete wiring using both hands.

#### Options

- 347V
- High Frequency Motion Sensor
- Hi/low sensor
- 0 - 10V Dimming

Fixture Watts	40W
Lumens	4,803
Efficacy	120 lumens/watt
Power Factor	0.93
Total Harmonic Distortion	15.38%
Certification	cULus
LED Life	100,000 hours
Colour Temperature	5000K
Warranty	5 Years
Operating temperature	-40°C to +40°C
CRI	>70

### DIMENSIONS

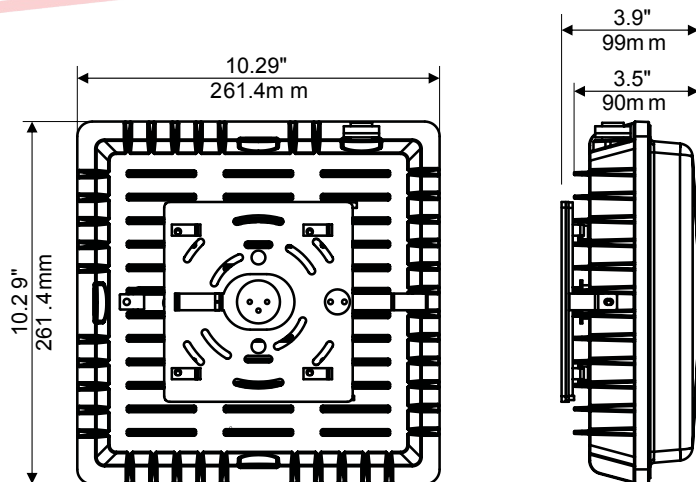

## ORDERING GUIDE

<b>SQJ</b>	-	<b>LED40</b>	-		-		-	
		<b>VOLTAGE</b>		<b>COLOR TEMP</b>		<b>FINISH</b>		<b>OPTIONS</b>
		<b>B - 120 - 277V*</b> <b>C - 347V</b>		<b>5K - 5000K*</b>		<b>BRZ - BRONZE*</b>		<b>SHFS - Standard On/Off high frequency motion sensor</b> <b>DHFS - Dimming High frequency motion sensor</b> <b>DIM - 0-10V DIMMING</b>

\* Standard configuration