

The VCS and LG Series of fixtures are elegantly designed, gooseneck fixtures that provide bright, even illumination for signs.



Project	
Туре	
Date	
Notes	

APPLICATIONS

Ideal for sign and accent lighting in retail and commercial applications.

SPECIFICATIONS

Construction

Domes, arms and mounting plate are made of aluminum with a durable powder coat paint finish. A 14 watt natural aluminum LED fixture is attached to the dome. Various combinations of fixtures and arms can be combined in custom colours. An optional swivel (sold seperately)can be attached to the dome to direct light where needed.

Mounting

Fixture can be surface mounted on a junction box on the wall.

Electrical

Total system wattage is 14 Watts. The standard unit has a high efficiency driver that operates at 120 - 277V as standard.

Arms

Available ARMS include:

- ARM1
- ARM2
- ARM3
- ARM4
- ARM5 ARM6

Finish Bronze, White, Black Custom Colours optional


Options

- Globes
- Guard
- Wire Cage (only applicable for LG4016)
- Swivel


i de la companya de	
Equivalent to	50W MH
Fixture Watts	14W
Lumens	>1100
Efficacy	79 lumens/watt


LED Life	100,000 hours
Certification	Approved to CSA standards
Colour Temperature	5000K (standard)
Warranty	5 Years
Operating temperature	-40°C to +40°C

DIMENSIONS












RABDESIGN.CA





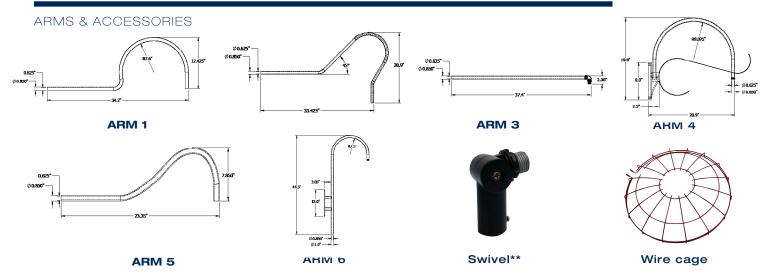

^{**}Swivel is included with ARM1, ARM2, ARM5 and ARM6

GLOBES & GUARDS



ORDERING GUIDE COLOUR TEMP. FINISH **VOLTAGE** ARMS VCS212A **LED 14** VCS214DM B - 120-277V* 3K - 3000K ARM1 **BLK - BLACK*** VCS214A **BRZ - BRONZE*** 4K - 4000K ARM2 LG4016 5K - 5000K **АРМЗ** WHT - WHITE* **CC - CUSTOM COLOUR** ARM4 ARM5 ORDERING GUIDE - ACCESSORIES (SOLD SEPARATELY) ARM6

GL00PR PRISMATIC GLASS
GL100F FROSTED GLASS
GL100 CLEAR GLASS
RGL100A (AMBER)
RGL100B (BLUE)
RGL100G (GREEN)
RGL100R (RED)

GL100PGO (POLYCARBONATE WHITE)

GD100CGS - GUARD

* Standard configuration