

The WSDS-LED is a decorative, energy efficient down light in a square cylindrical shape that can be used in a variety of commercial and residential applications.



### APPLICATIONS

**Ideal for retail buildings, schools, townhouse complexes and apartment buildings**

Project	
Type	
Date	
Notes	

### SPECIFICATIONS

#### Construction

The WSDS-LED24 is a decorative fixture with a die cast aluminum housing and a clear tempered glass lens held in place with a gasket, lens frame and three stainless steel screws.

#### Mounting

The fixture can be wall mounted to standard junction boxes. Unit can also be surface mounted with power from conduit entry.

#### LED Configuration

The fixture delivers a total lumen output of 2445 lumens at an efficacy of 111 lumens/watt. The LEDs have a colour temperature of 5000K.

#### Electrical

Total system wattage of the unit is 22W. The standard unit has a high efficiency driver that operates at 120-277V.


#### Finish

Black powder coat paint finish.

Equivalent to	<b>100W MH</b>
Watts	<b>22W</b>
Lumens	<b>2445</b>
Efficiency	<b>111 lumens/watt</b>

LED Life	<b>100,000 hours</b>
Colour Temperature	<b>5000K</b>
Warranty	<b>5 Years</b>
Operating Temperature	<b>-40° C to +40° C</b>
Certification	<b>cULus, DLC</b>
Power Factor	<b>0.9</b>
CRI	<b>&gt;80</b>
Total Harmonic Distortion	<b>14.15%</b>

### DIMENSIONS

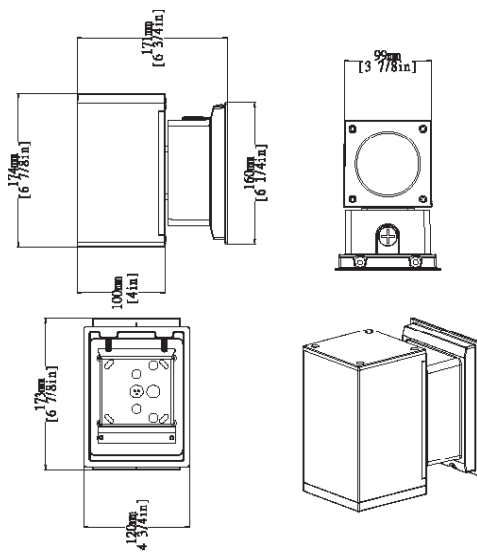

### ORDERING GUIDE

WSDS	-	LED24	-		-	
------	---	-------	---	--	---	--

VOLTAGE

COLOUR TEMP

FINISH

B - 120 - 277V\*

5K - 5000K\*

BLK - BLACK\*

\* Standard configuration