



APPLICATIONS

Ideal for lighting patios, yards, landscapes and building facades.

The FL2-LED30 is an energy efficient LED flood that replaces a 500W Quartz fixture. The fixture is available as a yoke or a knuckle mount.

Project	
Type	
Date	
Notes	

SPECIFICATIONS

Construction

Die cast aluminum housing with polycarbonate lens. Lens is firmly attached to fixture with 6 screws. The fixture has air flow fins at the back for heat dissipation. The FL2-LED30 is suitable for outdoor locations and is rated IP65.

LED configuration

36 LED chips with built in wide beam optics. LEDs have a colour temperature of 4000K and an operating temperature range of -40°C to +40°C.

Electrical

Total system wattage of the unit is 30W. The standard unit has a high efficiency driver that operates at 120 - 277V.

Mounting

The fixture is available as a knuckle mount or a yoke mount.

- Knuckle mount – ½" NPT aluminum knuckle that is to be mounted on to a cover plate (sold separately).
- Yoke mount – Steel yoke that can be rotated 180° to direct light wherever needed

Finish

Standard finish is Bronze.


Accessories

Bronze cover plate (sold separately).

Watts	30W
Equivalent to	500W Quartz
Lumens	3000
Efficiency	100 lumens per watt

Operating Temperature	-40°C - +40°C
Certification	cULus, IP65, DLC
LED Life	100,000 hours
Color Temperature	4000K
Warranty	5 years

DIMENSIONS

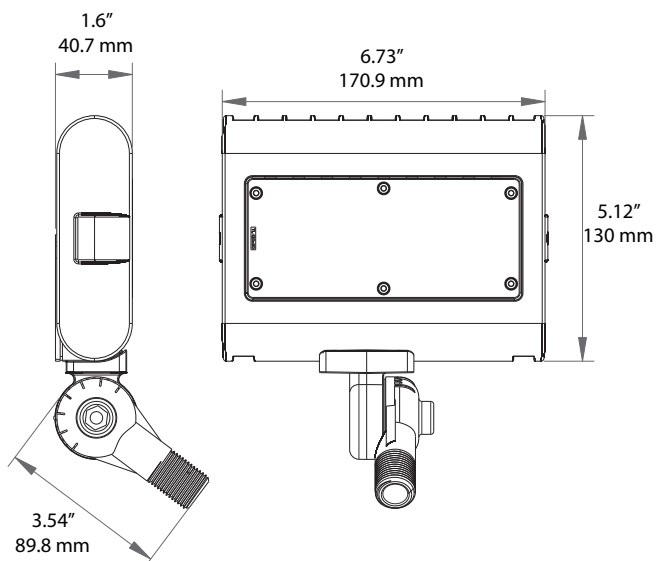

FL2-LED30 with Yoke Mount



ORDERING GUIDE

FL2	-	LED30	-		-		-	
		VOLTAGE		COLOR TEMP		FINISH		MOUNTING
		B - 120 - 277V*		4K - 4000K*		BRZ - BRONZE*		KN - KNUCKLE YK - YOKE

* Standard configuration