

The Bergma step light has a unique look with a polished stainless steel face plate and two recessed LEDs.



| | |
|----------------|--|
| Project | |
| Type | |
| Date | |
| Notes | |

APPLICATIONS

Ideal for stairs and building perimeters for accent lighting.

SPECIFICATIONS

Construction

Metal housing with two knock out power entries 7/8" KO. Housing has a white polyester powder coat finish and can be used for concrete pours.

Reflector

Ribbed specular aluminum.

Diffusor

Clear tempered, heat resistant glass, gasketed.

Fasteners

Captive and recessed stainless steel.

Mounting

For concrete pour only. For indoor and outdoor use.

LED's

Available in 3 watt with an integral driver. LEDs are available in WHITE, BLUE, RED and GREEN. They are also available with a narrow, medium or wide beam lens. Drivers are 120 volts.

Drivers

All drivers are integral 120 volts power in.

Face Plate


Standard face plate is a polished stainless steel. Aluminum face plates are available as painted or brushed.

Finish

All units that have aluminum face plates that are to be painted have a polyester powder coat finish. Standard colors are black and white. For custom colors please consult factory.

| | |
|------------------------------|--------------------------------|
| Fixture Watts | 3W |
| Rated Life | 100,000 hours |
| LED Color | White, Blue, Red, Green |
| Warranty | 5 Years |
| Operating temperature | -40° C to +40° C |

DIMENSIONS

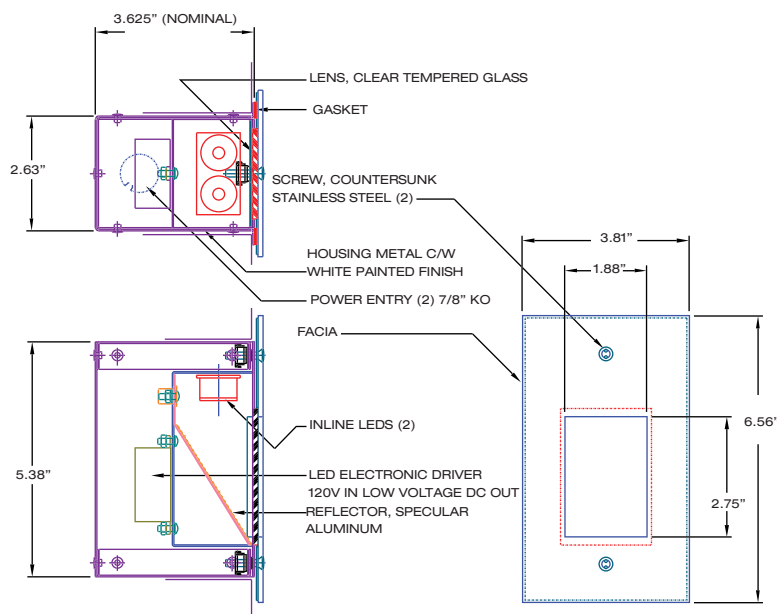

ORDERING GUIDE

| | | | | | | | | |
|--|---|--------------------------------|---|----------------|---|--|---|-----------------------------------|
| BERGMA | - | | - | | - | | - | |
| LED COLOR | | BEAM (for LEDs only) | | VOLTAGE | | FINISH | | OPTIONS |
| 1W- White 1R - Red 1B - Blue 1G - Green | | Narrow Medium Wide | | A - 120V | | SS- Stainless steel CC - Custom color | | BB - Back Box** PC - Photocell |

* Standard configuration