



The CLB-LED14 is a high efficiency multi-purpose ceiling light with a low profile that replaces a comparable 70W MH fixture.

### APPLICATIONS

**Ideal for low ceiling spaces such as small sized utility rooms, service areas, entrances, stairwells, mandooors and outdoor walkways.**

Project	
Type	
Date	
Notes	

### SPECIFICATIONS

#### Construction

The CLB-LED-14W is made from die cast aluminum housing with a clear polycarbonate lens. The unit has air flow openings around its perimeter for efficient heat sinking. A frosted lens is also available as a no cost option for a softer light effect. The fixture has three conduit entries, one on either side and one on the back in the center.

#### Mounting

The fixture is ceiling mounted and can be directly mounted on to standard junction boxes. There is a hanging hook assembly that allows easy installation. Once the base is installed to the ceiling, the fixture is attached using the quick hanging hook which frees up both hands while making connections

#### LED Configuration

Each fixture contains one high efficiency Chip on Board (COB) that delivers a total lumen output of over 1400 lumens at an efficacy of minimum 100 lumens/watt.

#### Electrical

Total system wattage of the unit is 14W. The standard unit has a high efficiency driver that operates at 120 - 277V.

#### Finish


Bronze or white finish is standard. Custom colors available.

#### Accessories

Frosted lens available as a no cost option.

Fixture Watts	14W
Lumens	min 1,400
Efficacy	min 100 lumens/watt
Rated Life	100,000 hours
Certification	cULus
LED Life	100,000 hours
Color Temperature	5000K (standard), 4000K (option) 3000K (option)
Warranty	5 Years
Operating temperature	-40°C to +40°C

### DIMENSIONS

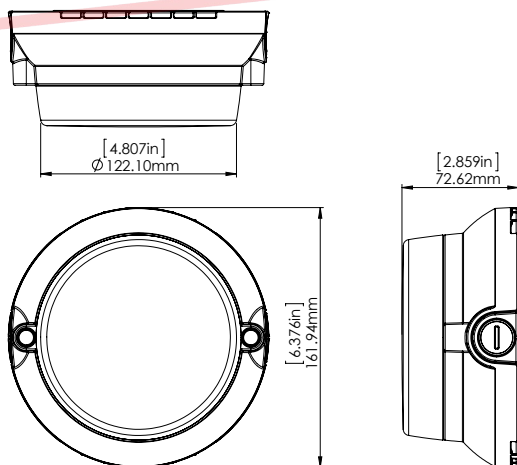

Shown with a White Finish



Shown with a Frosted Lens



## INSTALLATION INFORMATION

1. Separate mounting bracket from fixture by removing the screw. Attach mounting bracket to the junction box.



2. Rest fixture onto hinges and connect wires



3. Reattach fixture to the mounting bracket



## ORDERING GUIDE

<b>CLB</b>	-	<b>LED14</b>	-		-		-	
		<b>VOLTAGE</b>		<b>COLOR TEMP</b>		<b>FINISH</b>		<b>LENS</b>
		<b>B - 120 - 277V*</b>		<b>5K - 5000K*</b> <b>4K - 4000K</b> <b>3K - 3000K</b>		<b>BRZ - BRONZE*</b> <b>CC - CUSTOM COLOR</b>		<b>FR - FROSTED LENS*</b> <b>CL- CLEAR LENS</b>

\* Standard configuration