



GCL-LED150

Canopy Light



SPECIFICATIONS

Watts	149W
Lumens	20718
Efficacy (Lm/W)	139
Color Temp	4000K, 5000K*
Beam Angle	100X100°
Voltage	120-277V
CRI	>70
Housing Material	Aluminum
PF	>0.9
Operating Temp.	-40°C to +40°C
Certification	cULus
LED Life	100,000 hours
Lens Material	Polycarbonate
Mounting	Pendant Mount

*Standard Configuration



DESCRIPTION

Ideal for gas stations, outdoor canopy structures such as overhangs, walkways and underground parking garages.

APPLICATIONS



Gas Stations



Parking
Garages



Walkways




Overhangs


FEATURES

- Rugged fixture with aluminum housing and polycarbonate lens.
- Slim profile fixture that mounts onto a pendant stem.
- High efficacy fixture that delivers over 130 lumens per watt.
- Motion sensor optional.
- White finish.


DIMENSIONS

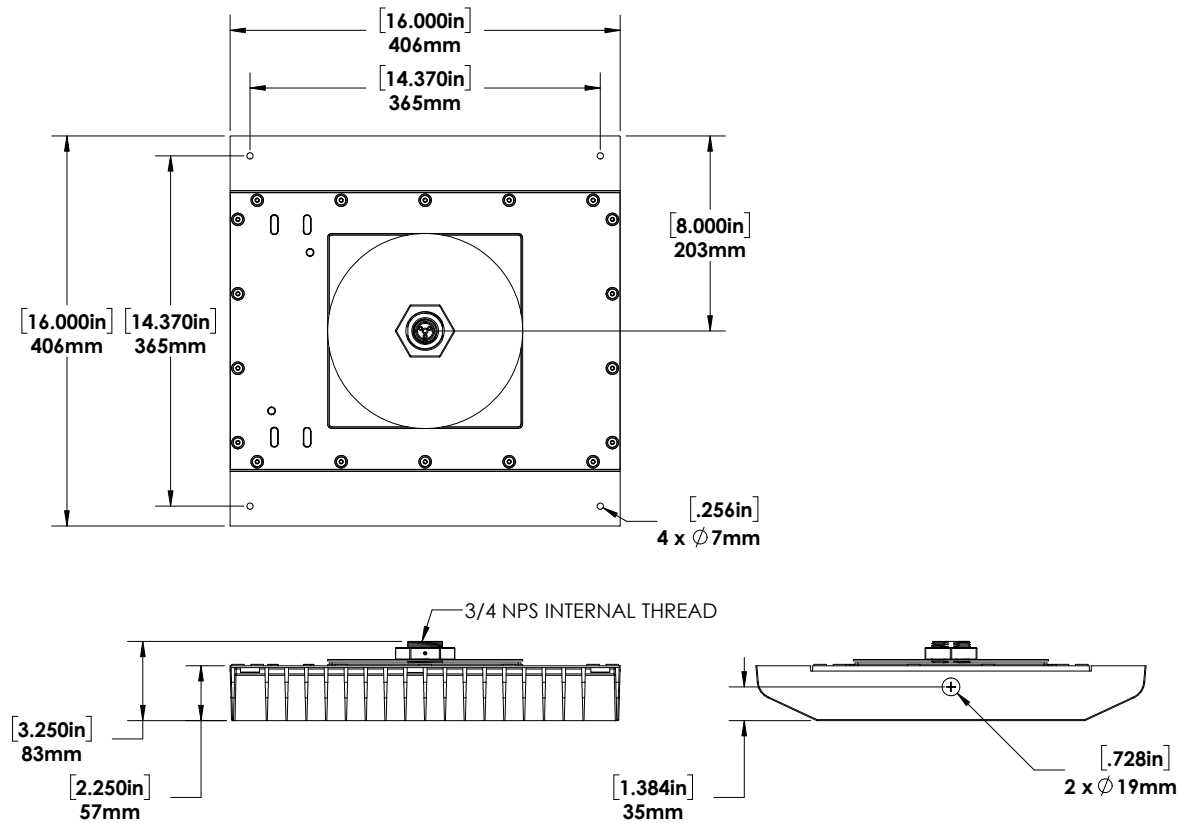

PENDANT MOUNTING

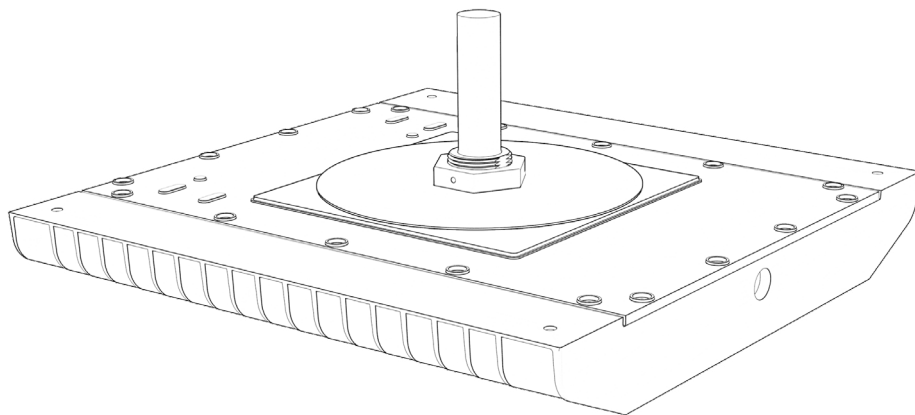

PHOTOMETRICS

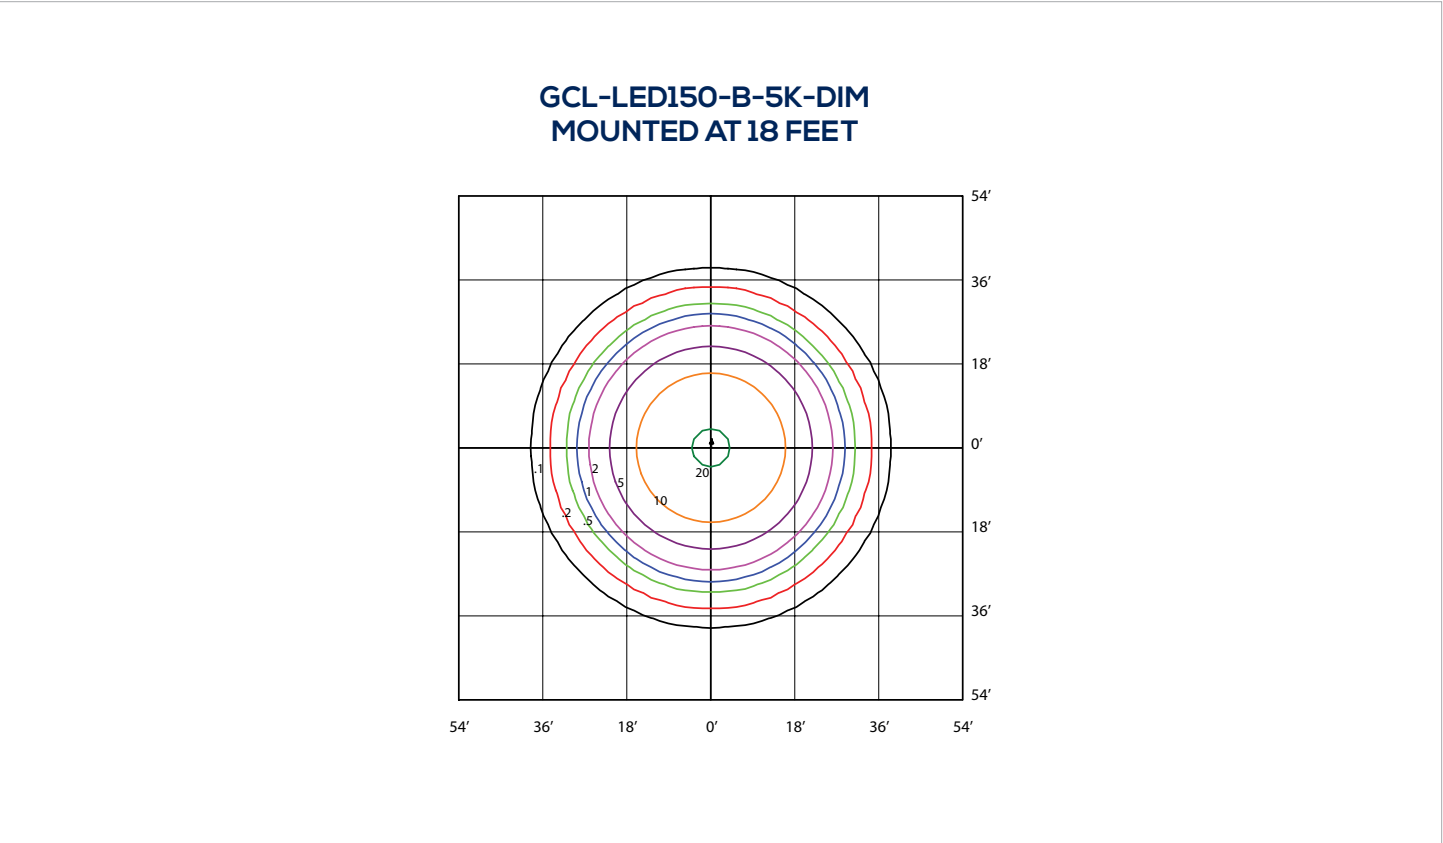

MODEL SPECIFICATIONS

MODEL NUMBER	VOLTAGE (V)	WATTAGE (W)	LIGHT OUTPUT (LM)	EFFICACY (LM/W)	THD (%)	PF	CCT (K)	CRI
GCL-LED150-B-4K-XXX-DIM	120-277	148.59	22110	148.8	7.44	0.994	3928	71.41
GCL-LED150-B-5K-XXX-DIM	120-277	148.61	20718	139.4	7.5	0.994	5058	76.51

ORDERING GUIDE

GCL	LED150					
		VOLTAGE	COLOR TEMP.	FINISH	DIMMING	OPTIONS
		B - 120-277V	4K - 4000K 5K - 5000K*	WHT - White CC - Custom Colours	DIM - 0-10V Dimming	DMS - Dimming PIR Motion Sensor

*Standard Configuration