

The LED Surface Mount Wrap is a 2' linkable linear fixture ideal for indoor use. The wraparound fixture features an easy to use link connector ideal for combining multiple fixtures in one row.



### APPLICATIONS

**Ideal for indoor use in stairwells, hallways, foyers, utility areas, corridors, & many more.**

<b>Project</b>	
<b>Type</b>	
<b>Date</b>	
<b>Notes</b>	

### SPECIFICATIONS

#### Construction

Housing is made of steel with polycarbonate end caps and a white powder coat paint finish. Flexible link connector allows you to easily combine up to eight linear fixtures in a row. Fixture is suitable for damp locations.

#### LED

The operating temperature of the fixture is -25°C to +55°C. Fixture is ideal for indoor use.

#### Electrical

Total system wattage of the unit is 27W. The standard unit has a high efficiency driver that operates at 120 V - 277 V.

#### Mounting

Easy mounting direct on the wall or ceiling. Knockouts are provided for mounting to standard 4" junction boxes.

#### Easy Wiring and Maintenance

Fixture comes complete with link connector in the box. Clips on either end can be slid off allowing installer to easily remove the lens for ease of wiring and maintenance.

#### Lens


Standard fixture comes with frosted lens.

#### Finish


Standard finish is white.

<b>Operating Temperature</b>	<b>-25°C to +55°C</b>
<b>Certification</b>	<b>ETL Listed</b>
<b>LED Life</b>	<b>50,000 hours</b>
<b>Colour Temperature</b>	<b>4000K, 4500K, 5000K</b>
<b>Warranty</b>	<b>5 years</b>
<b>CRI</b>	<b>&gt;80</b>
<b>Power Factor</b>	<b>0.91</b>
<b>Total Harmonic Distortion</b>	<b>9.9%</b>

### DIMENSIONS

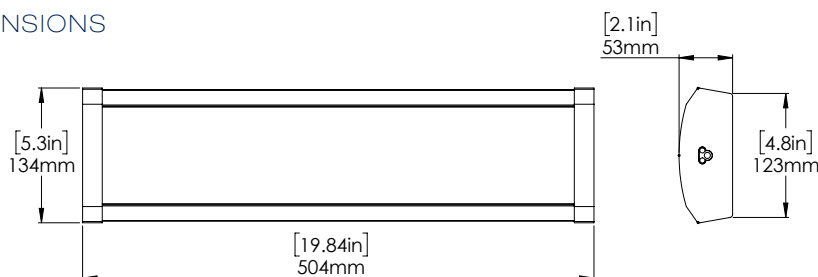

### KNOCKOUTS ON BACK OF THE FIXTURE

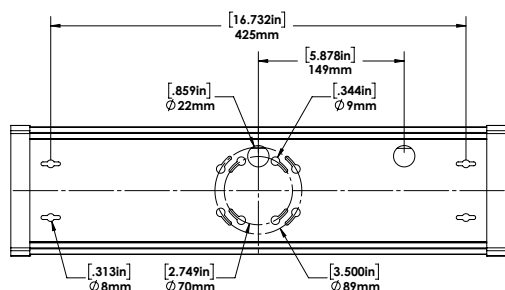

## EASY WIRING TAB



### Easy Installation

Clips on either end can be slid off allowing installer to easily remove the lens for ease of wiring and maintenance.

## LINK CONNECTOR



### Link Connector

The easy to use link connector fits into the end of the SMW4-LED fixture and enables you to combine up to eight fixtures in a row

(Fixture comes complete with link connector in the box.)

## ACCESSORIES (SOLD SEPARATELY)



### CORD & PLUG

5' cord and plug sold separately.



### INTERCONNECT


12" white interconnect cable sold separately.

Model No.	Voltage (V)	Wattage (W)	Light Output (lm)	Efficacy (l/w)	THD (%)	PF	CCT	CRI
SMW2D-LED24-B-4K-XXX-XX	120-277	27.0	2877.5	106.3	9.9	0.91	3987	84
SMW2D-LED24-B-4.5K-XXX-XX	120-277	27.0	2877.5	106.3	9.9	0.91	4500	84
SMW2D-LED24-B-5K-XXX-XX	120-277	26.9	2922.4	108.4	9.9	0.91	5164	86.8

## ORDERING GUIDE

<b>SMW2D</b>	-	<b>LED24</b>	-	<b>B</b>	-	<b>WHT</b>	-	<b>FR</b>
		<b>VOLTAGE</b>		<b>COLOUR TEMP</b>		<b>FINISH</b>		<b>LENS</b>
		<b>B - 120-277V*</b>		<b>4K- 4000K*</b> <b>4.5K - 4500K</b> <b>5K -5000K</b>		<b>WHT - WHITE*</b>		<b>FR - FROSTED LENS*</b>

## ACCESSORIES ORDERING GUIDE



**CORD & PLUG - SWM4-LED 5" CORD  
AND PLUG WHT**

**INTERCONNECT CABLE - SMW4-LED  
12" INTERCONNECT CABLE WHT**

\* Standard configuration