



The Star step light has a unique fluted lens that allows a wider distribution to help illuminate walkways and stairs.



Project	
Туре	
Date	
Notes	

APPLICATIONS

Ideal for theatres or where you want low level lighting effects.

SPECIFICATIONS

Construction

Metal housing with two knock out power entries 7/8" KO. Housing has a white polyester powder coat finish and can be used for concrete pours.

Diffusor

Thick, fluted clear acrylic lens.

Fasteners

Captive and recessed stainless steel.

Mounting

For concrete pour only. For indoor and outdoor use.

LED's

Available with S, 1.2 watt with an integral driver. LEDS are available in white, blue, red and green. They are also available with a narrow, medium or wide beam lens. Drivers are 120 volts.

Drivers

All drivers are integral 120 volts power in.

Face Plate

Face plate is made of aluminum with a polyester powder coat finish.


Finish

All units have a polyester powder coat finish. Standard colors are sparkle silver, black, and white. For custom colors please consult factory.

Fixture Watts

Rated Life	100,000 hours
LED Color	White, Blue, Red, Green
Warranty	5 Years
Operating temperature	-40°C to +40°C


DIMENSIONS

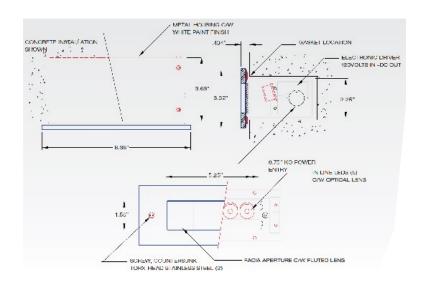





ORDERING GUIDE

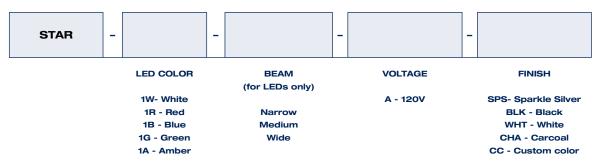

^{*} Standard configuration