



The WRD4 is an architectural, specification grade down light with advanced optics available in custom color finishes.



### **APPLICATIONS**

Ideal for perimeter lighting in retail buildings, atriums, condominiums and other architectural properties.

Project	
Туре	
Date	
Notes	

# **SPECIFICATIONS**

#### Construction

WRD4 has an extruded aluminum housing with a powder coat paint finish. The fixture has a clear tempered glass lens which is held in place with a gasket and three stainless steel screws making it approved for wet locations.

### Mounting

The fixture can be mounted directly on to the wall with a recessed junction box and has an easy mounting system. The galvanized steel plate is attached to the wall with 4 screws. The fixture then slides under the two pins and is secured by the two set screws at the bottom.

#### **Optics**

The fixture has a standard color temperature of 5000K. 4000K and 3000K are available as options. The fixture also has optional diffusion lenses for narrow, medium or wide beams.

## Electrical

The standard unit has a high efficiency driver that operates at 120-277V.


#### Finish

Standard finish is black, bronze and white. Custom colors available.e

Diameter	4.7"
Watts	14W
Lumens	1337
Efficiency	97 lumens/watt

Operating Temp	-40°C to +40°C
LED Life	100,000 hours
Color Temp.	5000K (standard), 4000K, 3000K (option)
Warranty	5 Years
Certification	Approved to uL/CSA standards

# **DIMENSIONS**

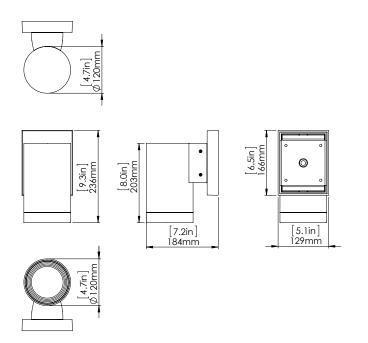





## **EASY INSTALLATION**

Step 1: Attach steel plate on the wall with 4 screws




Step 2: Slide fixture under the two pins till it locks in



Step 3: Secure with 2 set screws on the bottom



# ORDERING GUIDE

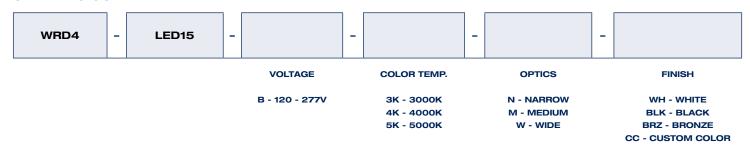

<sup>\*</sup> Standard configuration