

The WRD6 is an architectural, specification grade down light with advanced optics available in three sizes and custom color finishes.



### APPLICATIONS

**Ideal for perimeter lighting in retail buildings, atriums, condominiums and other architectural properties.**

Project	
Type	
Date	
Notes	

### SPECIFICATIONS

#### Construction

WRD6 has an extruded aluminum housing with a powder coat paint finish. The fixture has a clear tempered glass lens which is held in place with a gasket and three stainless steel screws making it approved for wet locations.

#### Mounting

The fixture can be mounted directly on to the wall with a recessed junction box and has an easy mounting system. The galvanized steel plate is attached to the wall with 4 screws. The fixture then slides under the two pins and is secured by the two set screws at the bottom.

#### Optics

The fixture has a standard color temperature of 5000K, 4000K and 3000K are available as options. The fixture also has optional diffusion lenses for narrow, medium, wide or extra wide beams.

#### Electrical

The standard unit has a high efficiency driver that operates at 120-277V.


#### Finish

Standard finish is black, bronze and white. Custom colors available.

Diameter	6"
Watts	29W
Lumens	2990
Efficacy	103 lumens/watt

Operating Temp	-40°C to +40°C
LED Life	100,000 hours
Color Temp.	5000K (standard), 4000K, 3000K (option)
Warranty	5 Years
Certification	Approved to uL/CSA standards

### DIMENSIONS

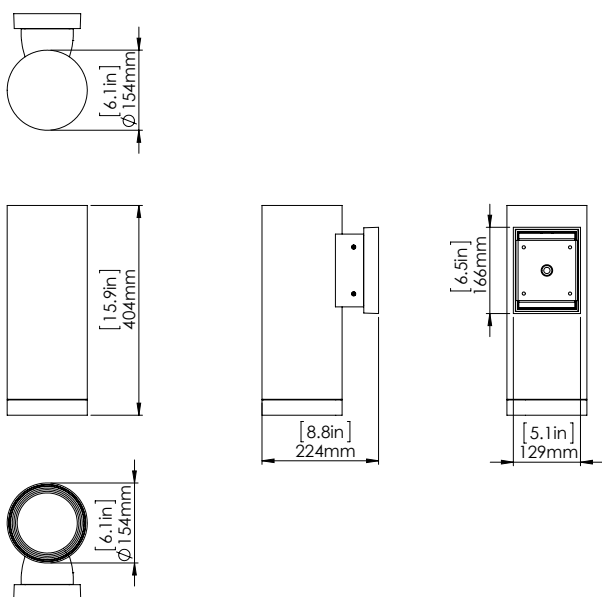

## EASY INSTALLATION

Step 1: Attach steel plate on the wall with 4 screws



Step 2: Slide fixture under the two pins till it locks in



Step 3: Secure with 2 set screws on the bottom



## ORDERING GUIDE

<b>WRD6</b>	-	<b>LED30</b>	-		-		-				
		VOLTAGE			COLOR TEMP.			OPTICS			FINISH
		<b>B - 120 - 277V</b>			<b>3K - 3000K</b>			<b>N - NARROW</b>			<b>WH - WHITE</b>
					<b>4K - 4000K</b>			<b>M - MEDIUM</b>			<b>BLK - BLACK</b>
					<b>5K - 5000K</b>			<b>W - WIDE</b>			<b>BRZ - BRONZE</b>
								<b>X - EXTRA WIDE</b>			<b>CC - CUSTOM COLOR</b>

\* Standard configuration