



## STEALTH LONG RANGE OUTDOOR SENSOR

*This Stealth outdoor sensor has a Long Range 15 degree view with double look down lens. Turns lights on from 5 seconds to 12 minutes. Available in bronze or white. Unit can be wired in parallel.*

**AUTO TEST LOGIC** 5 minutes of test time when powered. Rests to auto mode without further adjustment.

**COLOUR MATCHED LENS** Dark lens with bronze units and white lens with white units.

**HORIZONTAL LOCK NO-TOOL JOINTS** Keeps sensing pattern level for fast, error-free installation.

**LED DETECTION INDICATOR** Shows when sensor is detecting in daytime and glows red at night for on-guard deterrence.

**PHOTOELECTRIC CONTROL** Deactivates lights during daylight. Fully adjustable for 24 hour operation or custom applications.

**POWER CONSUMPTION** 1 watt.

**RF IMMUNITY** Circuits fully shielded for maximum radio frequency immunity.

**SURGE PROTECTION** Withstands up to 6000 volts.

**TIME ADJUSTMENTS** 5 seconds to 12 minutes.


**WALL SWITCH MANUAL OVERRIDE** Two flip logic prevents activation by momentary power outages. Override resets to auto at dawn. No extra wiring needed.

**WIDE SENSITIVITY CONTROL** Adjustable from 100% to 30%

**DETECTION** 15 degrees.



### DETECTION PATTERN

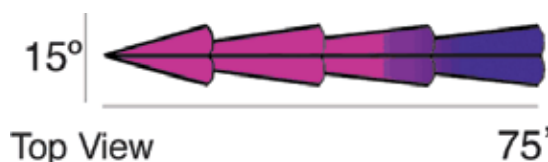

**SWITCHING CAPACITY** 1000 watts incandescent @ 120 volts, 8 amps.

**VOLTAGE** 120 volts AC 60 Hertz.  
Approval UL and CUL

The following fixtures can be used with the STUFF500 QB, Q1, Q3, QF150 QF300, QF500, HL150Q AND HL500Q

## Catalog Code

STL15

BRZ - BRONZE  
WH - WHITE

FINISH

The following fixtures can be used with the  
STUFF500 QB, Q1, Q3, QF150 QF300,  
QF500, HL150Q AND HL500Q

## Dimensions

