



- Ideal for parking areas, entrances, walkways and recreational areas
- High quality, cast aluminum back-plate housing with box mounting template.
- Rounded polycarbonate, frosted lens provides an even controlled light distribution
- Photocell for dusk-to-dawn operation
- Instant on/off

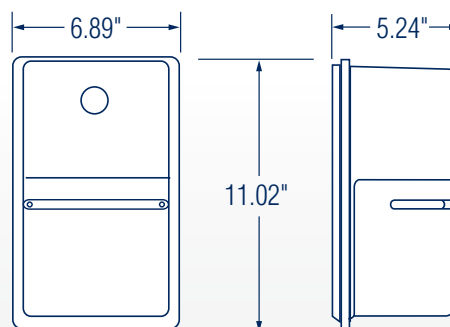

**WALL LIGHT**  
WLR



#### ORDER#

**WLR-LED20**  
**#050031**

INPUT WATTS	20W
EQUIVALENT TO	up to 70W HPS
LUMEN OUTPUT	1,032
LAMP LIFE	>50,000 hours
COLOR TEMP	5,000k
VOLTAGE	120VAC, optional 277VAC
WORKING TEMPERATURE	-40°C to +40°C
COLOR RENDERING INDEX (CRI)	>70
FINISH	Bronze
RATED IP65	

