



WLR

HPS CFL LED

The WLR is ideal for security lighting above entry ways, stairwells and pedestrian areas. The clear prismatic lens offers glare free light. Available in High Pressure Sodium and Compact Fluorescent and LED.

MOUNTING PLATE Die cast aluminum with provision for mounting the fixture to a standard octagon box or surface mount and using 1/2" knock out for providing power.

HOUSING Made of durable polycarbonate available in Bronze.

LENS Made of durable polycarbonate with prismatic pattern that offers glare free light.

LEDS Twelve LEDs producing 1032 lumens out of the fixture and 18 watt power consumption. The LEDs are rated for 50,000 hours minimum.

BALLAST All High Pressure Sodium ballasts are 120V normal power factor. Compact fluorescent ballasts are 120 - 277 or 347 volts electronic rated to -30°C. 120 - 277 volt driver for LED option.

SOCKET Medium base 4KV pulse-rated socket with a nickel-plated screw shell and a spring-loaded centre contact for High Pressure Sodium models. White thermo plastic with integral clips for lamp retention for Compact Fluorescent models.



LAMP All units come complete with lamp and photocell.

WATTAGES 20 watt LED, 70 High Pressure Sodium and 42 watt Compact Fluorescent.

FINISHES Bronze

OPTIONS Wire cage

APPROVAL CULus

Catalog Code

WLR

LAMP

LED20, 42CFL, 70HPS

VOLTAGE

120NPF, 120-277*, 347**

BRZ

FINISH

BRZ - BRONZE

PC

OPTIONS


PC - PHOTOCELL
WC*** - WIRE CAGE

* Available for LED, CFL options only.


** Available for CFL option only.

*** Ordered and shipped separately.

Dimensions

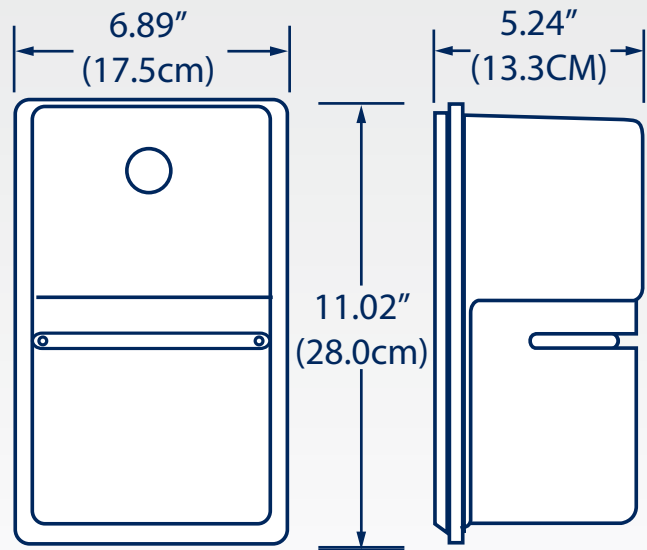

WIRE CAGE DETAIL

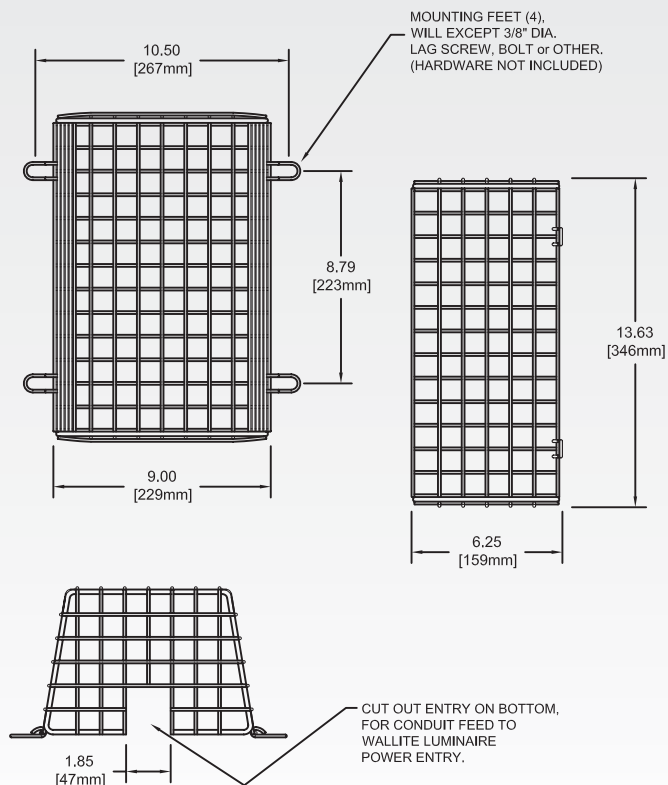

www.rabdesign.ca