



WPCS CUTOFF WALL PACK

Ideal for mounting above entry ways, townhouses, apartments, small strip malls and any location where light trespass is a concern.

HOUSING Die-cast aluminum with 1/2" NPS tapped holes located on the top and both sides of the fixture and mounting option on the back. Side hinged lens frame for ease of relamping.

REFLECTOR Specular anodized aluminum, removable for installation. Symmetrical light pattern maximizes distance between fixtures.

LENS The lens is a clear tempered glass, sealed with a continuous silicone rubber gasket.

BALLAST For High Pressure Sodium the following wattages are available 35, 50, 70, 100 watts in a 120V reactor ballast normal power factor. For Metal Halide 50 and 70 watts are available in a 120V reactor ballast normal power factor. For CFL's 42 watt 120 volts in an electronic ballast.

LAMP All units come complete with lamp.

FINISH All units have a powder coat paint finish. Standard colours are bronze and white. For custom colours please consult factory.



SOCKET Medium base 4KV pulse-rated socket with a nickel-plated screw shell and a spring-loaded centre contact.

OPTIONS Photocell

Catalog Code

WPCS

35HPS 50HPS 70HPS
100HPS 50MH 70MH 42CFL

LAMP

120NPF* 120, 277, 347

VOLTAGE

CHA - BRONZE
WH - WHITE
CC - CUSTOM COLOUR

FINISH

PC - PHOTOCELL

OPTIONS

* FOR HPS OPTION ONLY



Dimensions



CATALOG NUMBER: WPCS70HPS

[LUMCAT]WPCS70HPS
[LUMINAIRE]WITH SEMI-SPECULAR REFLECTOR AND CLEAR FLAT GLASS LENS
[LAMP]ONE 70 WATT HPS LAMP
[LAMP]CATJMH70/U. LUMEN RATING: 6400 Lms.
[OTHER]OPERATING AT 70 WATTS

SUMMARY DATA
EFFICIENCY (Total): 43.4 %
EFFICIENCY (Down / Up): 43.3 % / 0.1 %
EFFICIENCY (Street / House): 34.5 % / 8.9 %
LUMENS/LAMP: 5040
NO. OF LAMPS: 1
LUMINOUS OPENING: RECTANGULAR

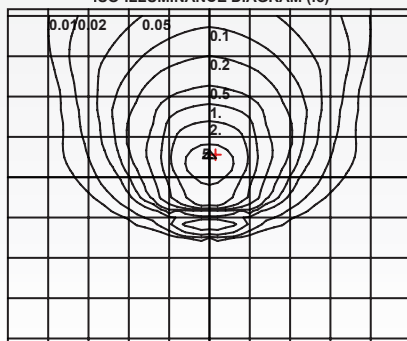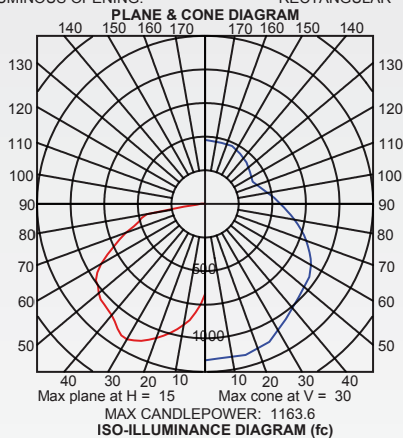



Mounting Height	Multiplier
10	1.000
15	0.444
20	0.250
25	0.160
30	0.111
35	0.082
40	0.063
45	0.049
50	0.040

+ = Point of max candela

CATALOG NUMBER: WPCS70MH

[LUMCAT]WPCS70MH
[LUMINAIRE]WITH SEMI-SPECULAR REFLECTOR AND CLEAR FLAT GLASS LENS
[LAMP]ONE VENTURE 70 WATT MH LAMP
[LAMP]CATJMH70/U. LUMEN RATING: 5040 Lms.
[OTHER]OPERATING AT 70 WATTS

SUMMARY DATA
EFFICIENCY (Total): 43.4 %
EFFICIENCY (Down / Up): 43.3 % / 0.1 %
EFFICIENCY (Street / House): 34.5 % / 8.9 %
LUMENS/LAMP: 5040
NO. OF LAMPS: 1
LUMINOUS OPENING: RECTANGULAR

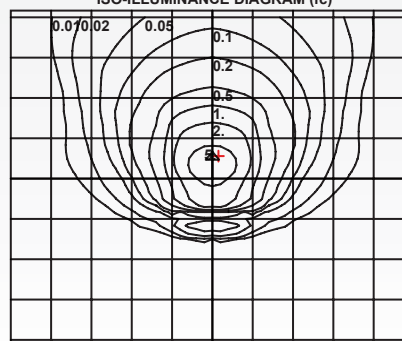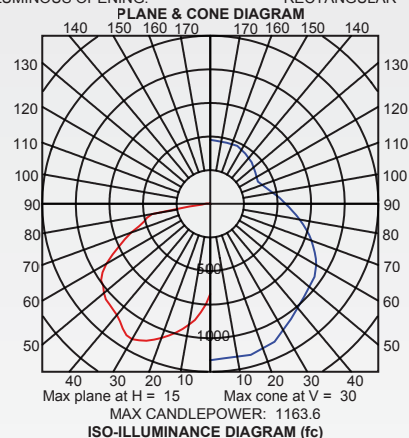

Mounting Height	Multiplier
10	1.000
15	0.444
20	0.250
25	0.160
30	0.111
35	0.082
40	0.063
45	0.049
50	0.040

+ = Point of max candela

www.rabdesign.ca