



WRD6

MH HPS LED

The WRD6 is a specification grade wall mounted down light and is slightly smaller than the WRD8. Light sources available are HPS, MH and LED. The bottom lens is removed with a quarter turn for ease of lamp replacement. The fixture also has an easy mounting system with a bracket mounted to the wall and the luminaire clips on and locked in place with two Allen screws. The WRD6 can be used for atrium's, building entrances, columns and perimeter lighting.

HOUSING Extruded aluminum with a powder coat paint finish.

LENS ASSEMBLY Die cast aluminum with a black baffle and clear tempered glass lens.

MOUNTING Mounts over a standard recessed junction box.

LED OPTION one LED array, delivering a minimum of 2000 lumen's from the source.

OPTICS Narrow, Medium and Wide for LED option.

DRIVER Standard LED unit has a 120-277 volt driver, optional 347 volt is available.



MH OR HPS OPTION Available in 50 or 70 watt metal halide or high pressure sodium.

BALLAST 120-277V electronic ballast is standard. Please consult Customer Service for 347V option.

FINISH Standard finishes are bronze, black and white. Custom colours are available, please consult factory.

HARDWARE Stainless steel

APPROVAL Approved to CSA standards

RATING IP54

TESTED IN ACCORDANCE WITH LM-79, LM-80.

Catalog Code

WRD6

LAMP

50HPS, 70HPS, 50MH, 70MH,
LED

LED OPTICS

NARROW, MEDIUM, WIDE



VOLTAGE

120 - 277, 347

FINISH

WH - WHITE
BLK - BLACK
BRZ - BRONZE
CC - CUSTOM COLOUR

Dimensions

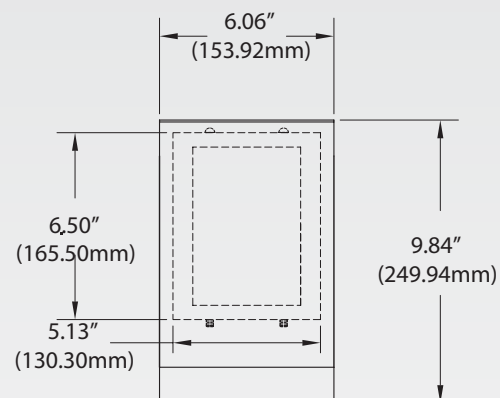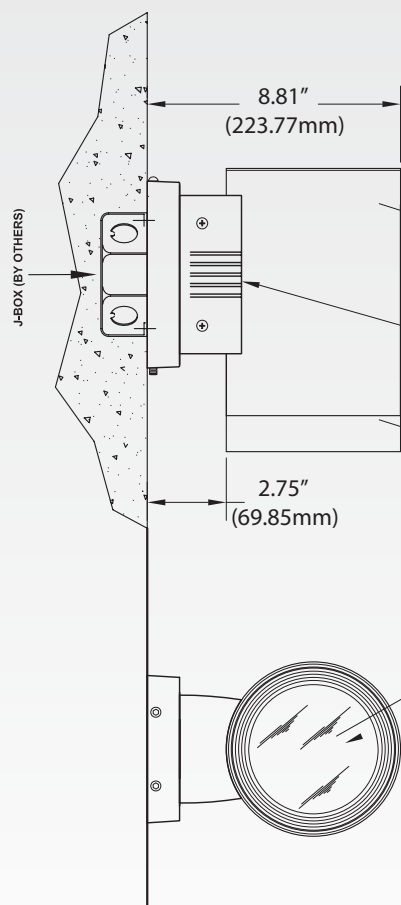

HOUSING: EXTRUDED ALUMINUM.
PAINTED WITH A DURABLE
POWDER COAT APPLIED FINISH.

MOUNTING ARM AND WALL PLATE
ARE MADE OF DIE CAST ALUMINUM.

SILICONE GASKET, PROVIDING A
WEATHERPROOF SEAL.

LENS: CLEAR TEMPERED GLASS,
SILICONE SEALED ONTO A ALUMINUM FRAM
WHICH CAN TWIST OFF FOR EASY ACCESS
TO LIGHT COMPARTMENT.

NOTE: RATED IP54