



## WRD8

MH HPS LED

*The WRD8 is a specification grade wall mounted down light and is slightly larger than the WRD6. Light sources available are HPS, MH and LED. The bottom lens is removed with a quarter turn for ease of lamp replacement. The fixture also has an easy mounting system with a bracket mounted to the wall and the luminaire clips on and locked in place with two Allen screws. The WRD8 can be used for atrium's, building entrances, columns and perimeter lighting.*

**HOUSING** Extruded aluminum with a powder coat paint finish.

**LENS ASSEMBLY** Die cast aluminum with a black baffle and clear tempered glass lens.

**MOUNTING** Mounts over a standard recessed junction box.

**LED OPTION** One LED array, delivering a minimum of 4000 lumen's from the source.

**OPTICS** Narrow, Medium and Wide for LED option.

**DRIVER** Standard LED unit has a 120-277 volt driver, optional 347 volt is available.



**MH OR HPS OPTION** Available in 50 or 70 watt metal halide or high pressure sodium.

**BALLAST** 120-277V electronic ballast is standard. Please consult Customer Service for 347V option.

**FINISH** Standard finishes are bronze, black and white. Custom colours are available please consult factory.

**HARDWARE** Stainless steel

**APPROVAL** Approved to CSA standards

**RATING** IP54

**TESTED IN ACCORDANCE WITH LM-79, LM-80.**

## Catalog Code

WRD8

LAMP

50HPS, 70HPS, 50MH, 70MH,  
LED

LED OPTICS

NARROW, MEDIUM, WIDE


VOLTAGE

120, 277, 347

FINISH

WH - WHITE  
BLK - BLACK  
BRZ - BRONZE  
CC - CUSTOM COLOUR

## Dimensions

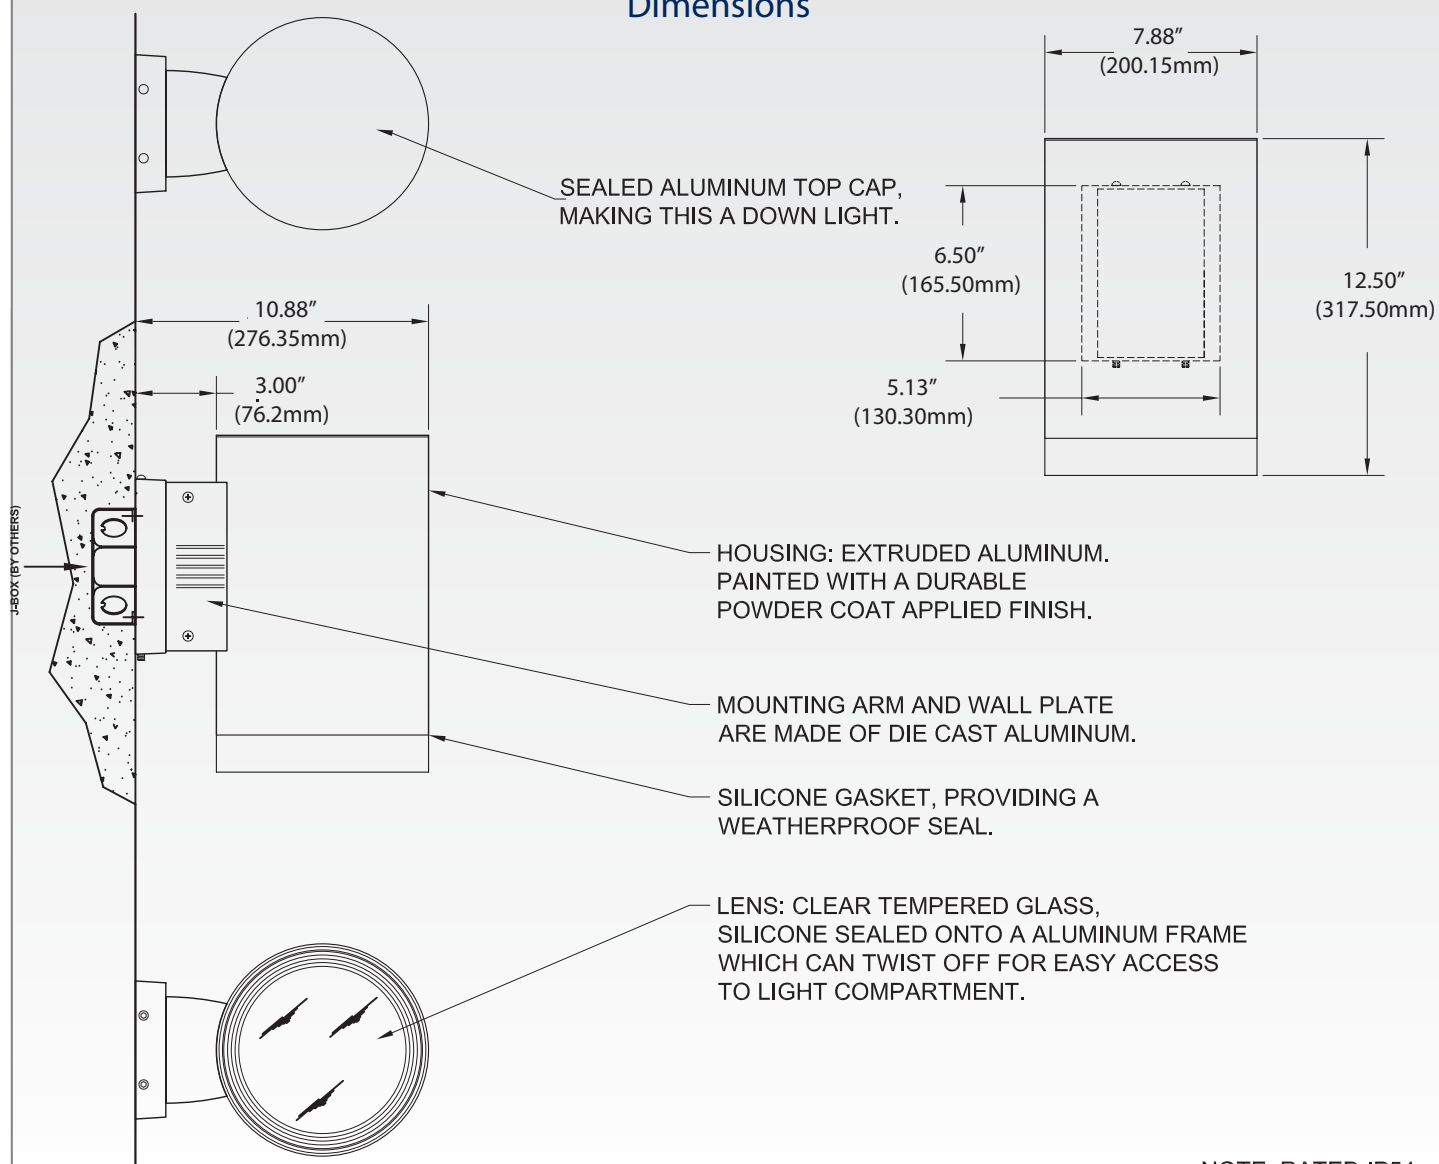

NOTE: RATED IP54

[www.rabdesign.ca](http://www.rabdesign.ca)