



WRUD6

MH HPS LED

The WRUD6 is a specification grade wall mounted up-down light and is slightly smaller than the WRUD8. Light sources available are HPS, MH and LED. The bottom lens is removed with a quarter turn for ease of lamp replacement. The fixture also has an easy mounting system with a bracket mounted to the wall and the luminaire clips on and locked in place with two Allen screws. The WRUD6 can be used for atrium's, building entrances, columns and perimeter lighting.

HOUSING Extruded aluminum with a powder coat paint finish.

LENS ASSEMBLY Die cast aluminum with a black baffle and clear tempered glass lens.

MOUNTING Mounts over a standard recessed junction box.

LED OPTION Two LED arrays, one up, the other down light, each delivering a minimum of 2,000 lumen's per array from the source.

OPTICS Narrow, Medium and Wide for LED option.

DRIVER Standard LED unit has a 120-277 volt driver, optional 347 volt is available.



MH OR HPS OPTION Available in 50 or 70 watt metal halide or high pressure sodium.

BALLAST All ballasts are tri-tap 120/277/347 volt high power factor.

FINISH Standard finishes are bronze, black and white. Custom colours are available, please consult factory.

HARDWARE Stainless steel

APPROVAL Approved to CSA standards

RATING IP54

TESTED IN ACCORDANCE WITH LM-79, LM-80.

Catalog Code

WRUD6

50HPS, 70HPS, 50MH, 70MH,
LED

LAMP

NARROW, MEDIUM, WIDE

LED OPTICS

120, 277, 347, 120-277E, 347E

VOLTAGE

WH - WHITE


BLK - BLACK

BRZ - BRONZE

CC - CUSTOM COLOUR

FINISH

Dimensions

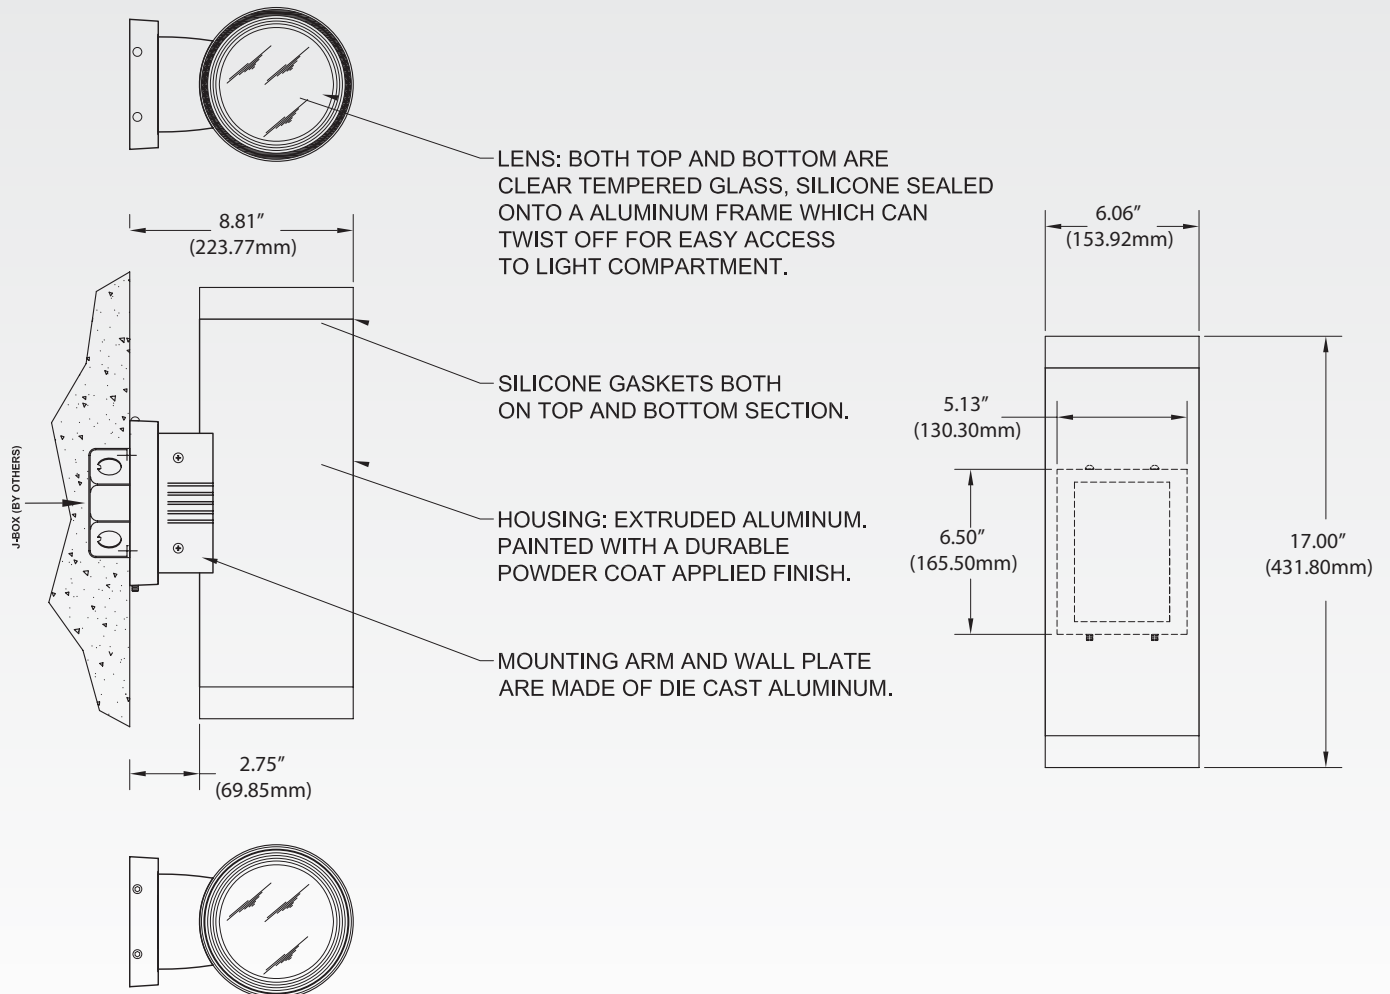

NOTE: RATED IP54