



CONTRAST R SIZE 2 FLOOD - BY THORN

The CONTRAST R is a high performance cylindro-parabolic floodlight with symmetrical distribution. Front glass and reflectors can be rotated to give alignment of the beam profile to suit the application. The CONTRAST R flood has a wide arrangement of attachments including louvres, protective grills, barn doors and colour lens. For use in sports, facade and landscape lighting. Available in 250 and 400 watt metal halide. For lower wattages refer to Size 0 and Size 1.

HOUSING Die cast aluminum with a polyester powder coat finish in grey.

LENS Clear tempered glass.

REFLECTOR

REFLECTOR #1 - glass with medium/wide symmetrical distribution

REFLECTOR #2 - with wide symmetrical distribution

REFLECTOR #3 - with narrow/wide symmetrical distribution.

BALLAST All ballasts are Tri-Tap 120,277,347 volts, or electronic.

WATTAGES Available in 250 and 400 watt Metal Halide.

LAMP All units come complete with lamp.



SOCKET 4KV pulse-rated porcelain socket for double ended socket spring loaded for E40 lamps.

INSTALLATION / MOUNTING Fixture is fully adjustable on a yoke.

OPTICS / REFRACTORS Prismatic glass available in extra wide, wide, medium and narrow distribution.

OPTIONS Louvre, Visor, Adjustable Louvre, Wire Guard, Sand Blasted Glass, Long Stirrup, Barn Door, Spill Shield and Colour Filters available in Red, Blue, Green and Yellow. All are ordered separately.

Catalog Code

CONR2

250MH G40, 400MH E40

LAMP

R2 L1 - REFLECTOR NO1
R2 L2 - REFLECTOR NO2
R2 L3 - REFLECTOR NO3

REFLECTOR

120 277 347, 120-277E, 347E

VOLTAGE

R2 GL S/S XEXT - PRISMATIC GLASS EXTRA WIDE, R2 GL A/S EXT - PRISMATIC GLASS WIDE, R2 GL A/S SIT - PRISMATIC GLASS MEDIUM, R2 GL/FR S/S SINT - PRISMATIC GLASS NARROW

OPTICS / REFRACTORS


R2 FILTER BLUE, R2 FILTER GREEN,
R2 FILTER RED, R2 FILTER YELLOW

COLOUR FILTER OPTIONS

R2 LV - LOUVRE, R2 VS - VISOR,
R2 LV/AJ - ADJUSTABLE LOUVRE,
R2 LV/HC - HONEYCOMB LOUVRE,
R2 WG - WIRE GUARD,
R2 FILTER/FR - SAND BLASTED FILTER

ACCESSORIES

Dimensions

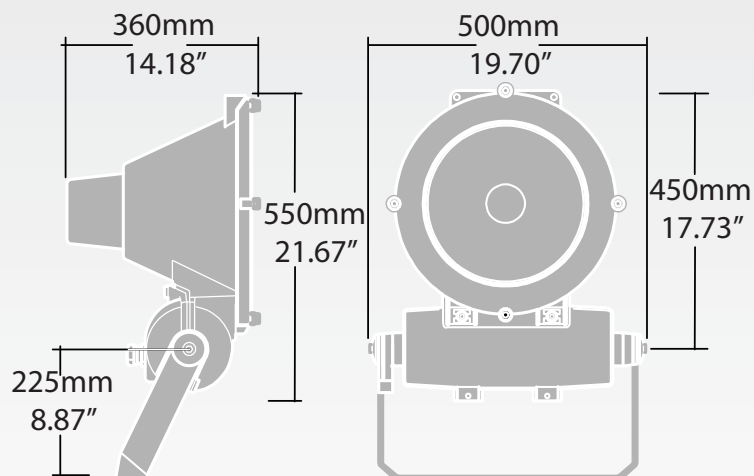

Mounting Detail

