




H System Floods

H101 Bell



DIMENSIONS

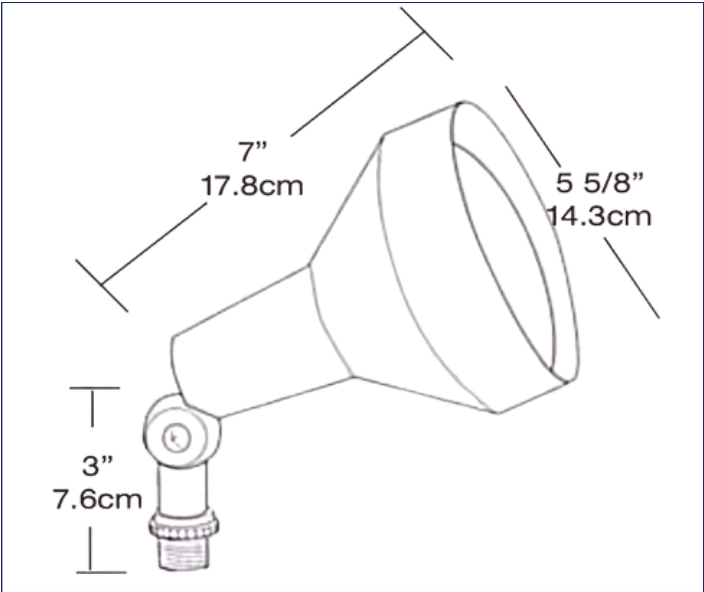

CATALOGUE CODE

H101

MODEL

FINISH

- A - BRONZE
- B - BLACK
- W - WHITE
- VG - VERDE GREEN

The H101 Bell is a durable one piece die cast flood with a rugged mounting arm, weatherproof gasket and drainage holes. Accepts 150 watt PAR 38 maximum lamp. The H101 Bell has an assortment of interchangeable hoods, guards, and visors. The H101 bell is ideal for use in both commercial and residential lighting for landscape and highlighting architectural features. The H101 can also be used with any of our outdoor sensors.

SPECIFICATIONS

	H101
Housing	Rugged die cast aluminum housing. Housing is designed so that the lamp is recessed 1" from the lip for side glare reduction. The housing also has a set screw for hood, grill or visor attachment. Housing has a powder coat paint finish.
Mounting Arm	Heavy duty mounting arm with internal O-ring, locking teeth, and stainless steel screw. EZ grip locknut matches fixture finish and can be adjusted with fingers, pliers or a screwdriver.
Socket	Medium base, Porcelain socket with a large silicone rubber gasket that provides weatherproof protection around the lamp and socket.
Lamp	Maximum wattage 150 watt PAR38. Lamp not included.
Finish	Powder coat paint finish available in White, Charcoal, Bronze and Verde Green.
Options	The following options are ordered and shipped separately. Hood, Guard and Visor. The above options are available in matching colours.

OPTIONS ORDERED SEPARATELY

Visor	
Hood	
Guard	