



LED Undercabinet Ultra Thin Puck Light



UCP-LED

DIMMABLE



EACH UNIT INCLUDES:

- 1 - Puck Light
- 1 - Cable Connector
- 1 - Mounting screw
- 1 - 6" Male-to-Male Connector



NATURAL WHITE (4000K)

or

WARM WHITE (3000K)

** Power Supply and accessories sold separately (see back)*

DESCRIPTION

Pucklights can be combined with UC/UCT linear models.

Available in Natural White (NW-4000K) or Warm White (WW-3000K)

LEDs have a greater than 50,000 hour life

Easy installation – Hardwire or plug-in power supply required. (see back)

Dimming option available when using a standard TRIAC dimmer and hardwire installation. If using a plug-in power supply, a separate dimmer controller is available

Voltage 24DC

APPLICATION

*Ideal for smaller areas:
under cabinets, shelving,
bookcases, walls and
task lighting*

Installation and ordering information on reverse.

¹ Available separately.


LED

LED Undercabinet

Ultra Thin Puck Light



INSTALLATION DIAGRAM

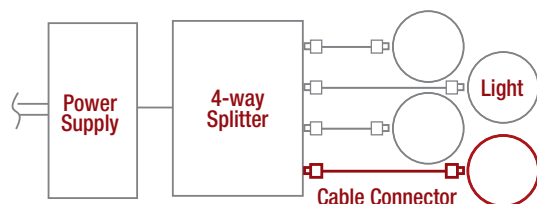

POWER SUPPLY REQUIREMENT

PRODUCT	# PIECES		WATTAGE		TOTAL WATTAGE
UCP-LED		x	3 Watts	=	

*** IMPORTANT ***
EACH SERIES RUN
MUST NOT EXCEED
36WATTS

ORDERING INFO

PRODUCT	PROD#	DESCRIPTION	WATT	DIMENSIONS
Natural White Unit * 4000K	88897	UCP-LED-NW	3W	D-90mm x H-6mm
Warm White Unit * 3000K	88896	UCP-LED-WW	3W	D-90mm x H-6mm
Plug-in Power Supply	88864 88865 88866 88867	UC-6W Power Supply UC-12W Power Supply UC-24W Power Supply UC-36W Power Supply	6W 12W 24W 36W	L-45mm x W-25mm x D-31mm L-68mm x W-25mm x D-50mm L-96mm x W-30mm x D-45mm L-96mm x W-30mm x D-45mm
Hardwire Power Supply	88860 88859 88857	UC-40W Hardwire Kit UC-H/W 100W ² UC-H/W 150W ²	40W 100W 150W	L-142.8mm x W-54.3mm x D-53.9mm
Dimmer (for plug-in power supply)	88872	UC-Dimmer Controller		L-85mm x W-25.4mm x D-12.7mm
On/Off Switch	88871	UC-Switch Connector		L-33mm x W-33mm x D-8mm
Output Receptacle (splitter)	88873 88874	UC RCPT DC 4 (Allows you to split the low voltage power into 4 separate runs) UC RCPT DC 8 (Allows you to split the low voltage power into 8 separate runs)		

* EACH UNIT INCLUDES: (1) puck light, (1) cable connector, (1) male-to-male connector and (1) screw

² For use with multiple run applications. Output receptacle (splitter) is required to tie in runs to 100W or 150W transformer

Contact us for more information: info@rdalighting.com

RDA Lighting Inc. 222 Islington Ave., Toronto, ON M8V 3W7
 TEL. 416-252-9454 / 800-268-0381 | FAX. 416-252-9664 / 800-668-5517

