



CHAMPION SPORTS LIGHTER - BY THORN

The Champion flood light is the best option for lighting small sports complexes and general areas where the control of light is critical. The Champion has a minimum of 4 lamp positions and are adjustable on-site for greater control. Asymmetric floodlighting for 1000 or 2000 watt lamps. The Champion's front glass is inclined within the fixture body so that the light passes through the glass at an angle that does not generate significant internal reflections and light losses. The Champion has a simple aiming site that enables aiming on the azimuth angle. Rear access for lamp replacing.

HOUSING Die cast aluminum unpainted.

LENS 4mm clear tempered glass with a continuous gasket.

REFLECTOR Asymmetric reflector.

BALLAST All ballasts are Tri-Tap 120,277,347 volts. Available wattages are 1000, 2000. Please note ballast and capacitor are remote mounted in a weather proof enclosure.

SOCKET HQI double ended socket.



LAMP Included. The following lamps are used for the Champion. 1000 or 2000W HQI-TS metal halide double ended (Osram) short arc. 2000W MHN-LA metal halide double ended (Osram) long arc. 1000 or 2000W metal halide double ended (Philips) long arc.

FINISH Raw aluminum.

OPTIONS Front visor, side visor, rear visor, wire guard, reverse mounting stirrup.

Catalog Code

CHMP

LAMP

1KW HQI TSS OS WI,
1KW MHN LA PH WI,
2KW HQI TSL OS WI,
2KW HQI RSS OS WT,
2KW MHN LA PH WI

VOLTAGE


120, 277, 347,

OPTIONS


WG - WIRE GUARD
PRS - REVERSE STIRRUP
FSW - ADJUSTABLE FRONT
AND SIDE VISOR,
PRV - ADJUSTABLE REAR
VISOR

RAB
DESIGN

Dimensions

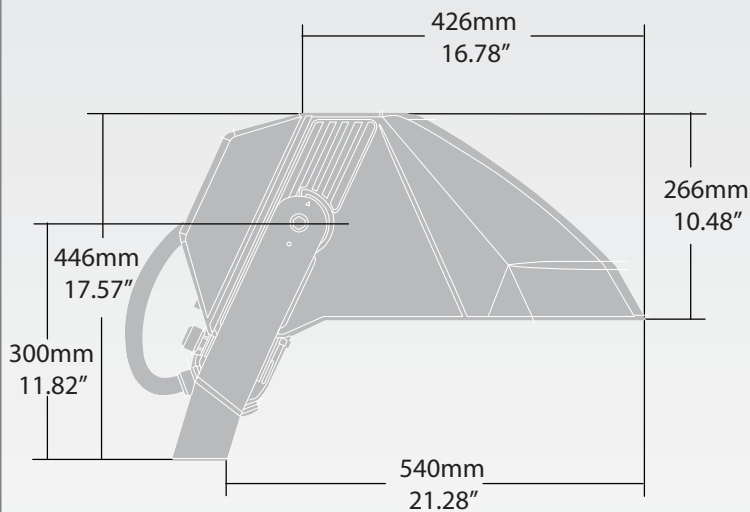

Mounting Detail

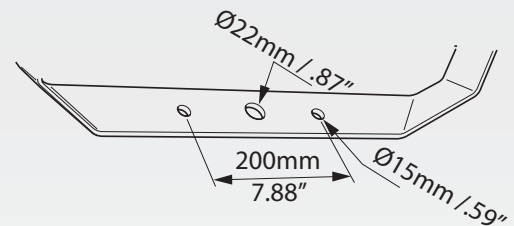

www.rabdesign.ca