



LOS1000W 120 OCCUPANCY SENSOR

Fits decorator wall plates with only 1/2" protrusion. 120 volts. Gangable. Full 180° view covers 1000 sq. ft. Can be wired in parallel. LED indicator, wallplate included.

COMPATIBILITY Compatible with dimmers and electronic ballasts. Can be wired in parallel.

EASY INSTALLATION Fits decorator wall-plates with only 1/2" protrusion. Fits single and multi-gang outlet boxes. Tamper proof control cover. Smart box mounts to standard rectangular boxes.

MAXIMUM RELIABILITY Light only when you need it. No ON switch so lights are never left on by mistake.

MAXIMUM RELIABILITY Superb small movement sensitivity within 18 feet. LOS1000 has "ZAPS" - Zero Arc Point Switching to protect relay contacts, lengthen ballast and sensor life.

ADJUSTMENTS Time

LISTING CUL US for indoor applications.

COVERAGE AREA 1000sf

DETECTION 180° view covers 1000 sq. feet

FLUORESCENT & INCANDESCENT WATTS SWITCHED 1000 watts

MANUAL SWITCH Off - Auto

POWER CONSUMPTION Negligible


RATINGS AMPS HORSEPOWER
8 amps 1/6 horsepower

TIME DELAY 30 seconds to 15 minutes

COLOUR White **WEIGHT** 0.3lbs.



DETECTION PATTERN

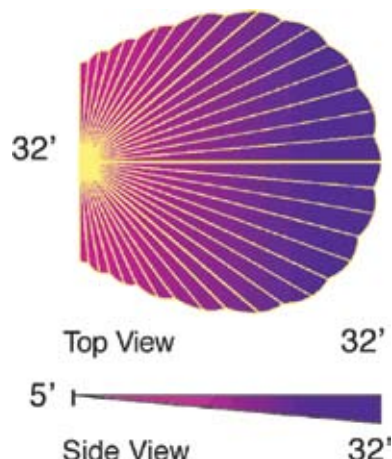

DIMENSIONS

