



## STEALTH 360 DEGREE OUTDOOR SENSOR

*Super Stealth Sensor with total 360 + 180 "Can't Miss" coverage, surge protection, scanning LEDs, evening timer, colour matched lens, and Universal CU4 cover plate. Turns lights on from 5 seconds to 12 minutes. Available in bronze or white.*

**ADVANCED DETECTION LOGIC** Minimizes false triggers.

**EVENING TIMER** Keeps lights on for 1-8 hours after dusk. Then sensor is motion activated until dawn.

**LENS MASKS** Customized press apply lens mask included to reduce coverage easily.

**PHOTOELECTRIC CONTROL** Deactivates lights during daylight. Fully adjustable for 24 hour operation or custom applications.

**POWER CONSUMPTION** 1 watt.

**RF IMMUNITY** Circuits fully shielded for maximum radio frequency immunity.

**SCANNING LEDs** 3 LEDs continually scan back-and-forth.

**SET IT AND FORGET IT** STL360's full coverage pattern reduces need for aiming and adjustment.

**SURGE PROTECTION** Withstands up to 6000 volts.


**TEMPERATURE COMPENSATION** Sensitivity adjusted automatically for consistent detection in hot and cold ambient temperatures.

**TIME ADJUSTMENT** 5 seconds to 12 minutes.

**VOLTAGE** 120 volts AC 60 Hertz.



### DETECTION PATTERN

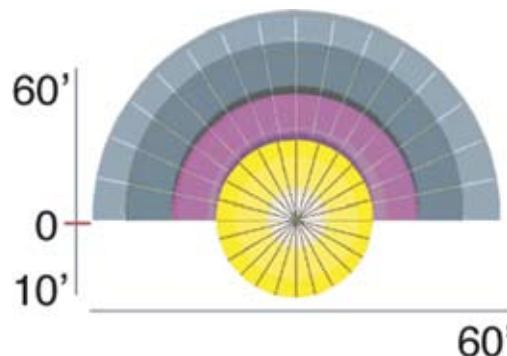

**WALL SWITCH MANUAL OVERRIDE** Two flip logic prevents activation by momentary power outages. Override resets to auto at dawn. No extra wiring needed.

**WIDE SENSITIVITY CONTROL** Adjustable from 100% to 30%

**DETECTION** Senses 180 degrees out and 360 degrees down for total detection.

**SWITCHING CAPACITY** 1000 watts incandescent @ 120 volts, 8 amps.

**COLOUR** bronze or white

**Approval** UL and CUL

**The following fixtures can be used with the STL360 QB, Q1, Q3, QF150, QF300, QF500, HL150Q AND HL500Q**

## Catalog Code

**STL360**

BRZ - BRONZE  
WH - WHITE

FINISH

The following fixtures can be used with the  
STL360 QB, Q1, Q3, QF150, QF300, QF500,  
HL150Q AND HL500Q

## Dimensions

