



APPLICATIONS

Ideal for parking lots, pathways and perimeter lighting applications

RAL-LED40

Post Top Area Light

The RAL-LED40 is a high efficiency area light with a Type 5 distribution. Intelligently designed, this fixture provides superior lighting performance and significant energy savings over traditional fixtures.

Project	
Type	
Date	
Notes	

SPECIFICATIONS

Construction

Precision die cast aluminum housing with prismatic polycarbonate lens. The fixture offers superior heat sinking with continuous air-flow fins around the perimeter of the fixture.

Optics

Unit has 6 high efficiency LED Chips on Board (COB) that have an efficacy (lumens/watt) of 90. The LEDs have a color temperature of 5000K. (4000K option also available) The operating temperature range is -40°C to +40°C. LED life is 100,000 hours.

Beam Distribution

Available in a Type 5 beam distribution. Also available in a type 3 beam distribution as an option.

Mounting

Standard unit comes with a spider mount assembly that slip fits a 2-3/8" diameter tenon.

Electrical

Total system wattage is 40W. The standard unit has a high efficiency driver that operates at 120 - 277V.

Finish

Standard finish is Bronze. Please consult factory for custom color.

Options



- Photocell
- 0-10V Dimming

Warranty

5 years

Input Watts	40W
Lumens	min. 3,600
Efficacy	min. 90 lumens per watt
Equivalent to	150W MH
Beam Distribution	Type 5 (standard) Type3 (option)
Operating Temperature	-40°C to +40°C
Certification	cULus, IP65
Warranty	5 Years
Color Temperature	5000K (standard) 4000K (option)
LED Life	100,000 hours

DIMENSIONS

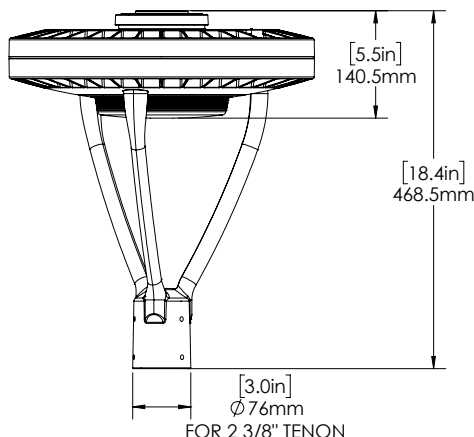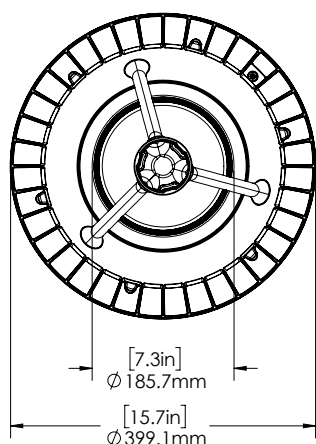

Shown with Photocell



ORDERING GUIDE

RAL	-	LED40	-		-		-		-		-	
		VOLTAGE		COLOR TEMP		BEAM		FINISH		MOUNT		OPTIONS
		B - 120 - 277V*		5K - 5000K* 4K - 4000K		T5 - TYPE 5* T3 - TYPE 3		BRZ - BRONZE* CC - CUSTOM		PT - POST TOP MOUNTING		DIM-0 - 10V Dimming PC - Photocell

* Standard configuration