

## INSTALLATION INSTRUCTIONS



## ELECTRICAL SHOCK HAZARD

**READ, UNDERSTAND, and FOLLOW** these instructions  
before installing the equipment.

## WARNING


Disconnect the Electrical supply power at the service panel (fuse or circuit breaker box). Failure to do so could result in serious injury or death. Only qualified electricians should install this fixture and the installation **MUST** conform to the Canadian Electrical Code Part I and all local codes and ordinances. Ensure that only proper tools, materials, and equipment are used to complete the installation.

## SAFETY

- Proper grounding is required to ensure personal safety.
- Fixture should be mounted in locations where unauthorized personnel will not readily subject it to tampering.
- Do not use this equipment for anything other than its intended purpose.
- Servicing this equipment should be performed by qualified service personnel.
- Save these instructions.

## INSTALLATION

1. Remove the top cap from the compartment box by loosening top screws.
2. Mount the compartment box to the desired location.
3. Reattach the top cap to the box by tightening the screws.
4. Connect the Black Flex cable to a junction box (not included), as per the wiring instructions.
5. Connect the white two prong cable to UC-120 LED.

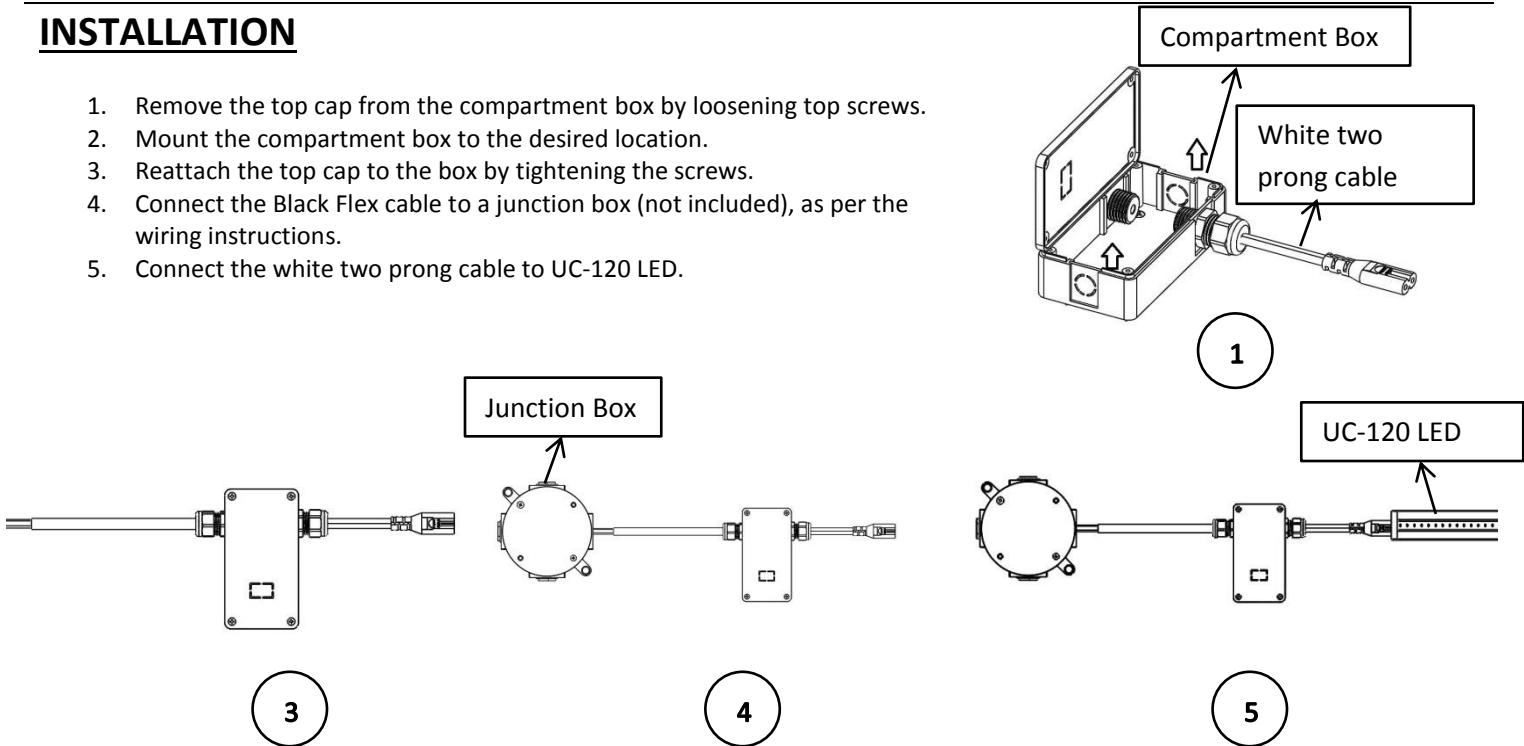

## WIRING

- Check that the line voltage is correct.
- Connect fixture **GROUND** (green) wire to power supply **GROUND** (green) wire.
- Connect fixture **WHITE** wire to power supply **NEUTRAL** wire.
- Connect fixture **BLACK** wire to power supply **LINE** wire

## INSTRUCTIONS D'INSTALLATION



## RISQUE D'ÉLECTROCUTION

**LIRE, COMPRENDRE, et SUIVRE** ces instructions avant d'installer l'équipement.

## AVERTISSEMENT



Débranchez l'alimentation de l'alimentation électrique au panneau de service (de fusible ou de disjoncteur). Ne pas le faire pourrait entraîner des blessures graves ou la mort. Seul un électricien qualifié doit installer cet appareil et l'installation doit conformer au code électrique canadien Partie I et tous les codes et règlements locaux. S'assurer que seuls les outils, les matériaux et l'équipement approprié est utilisé pour terminer l'installation avant de tenter l'installation.

## SÉCURITÉ


- Pour votre sécurité, il est nécessaire d'effectuer une mise à la terre appropriée.
- L'équipement doit être monté dans des endroits où le personnel non autorisé ne sera pas facilement sous réserve de l'altération.
- Ne pas utiliser cet équipement pour autre chose que sa destination.
- Entretien de cet équipement doit être effectuée par un personnel qualifié.
- Conservez ces instructions pour référence future.

## INSTALLATION

- Retirez le couvercle du compartiment en desserrant les vis.
- Montez le compartiment à l'emplacement souhaité.
- Refixez le couvercle sur la boîte en.
- Connectez le câble Black Flex à une boîte de jonction (non fournie), conformément aux instructions de câblage.
- Connectez le câble blanc à deux broches au UC-120 LED

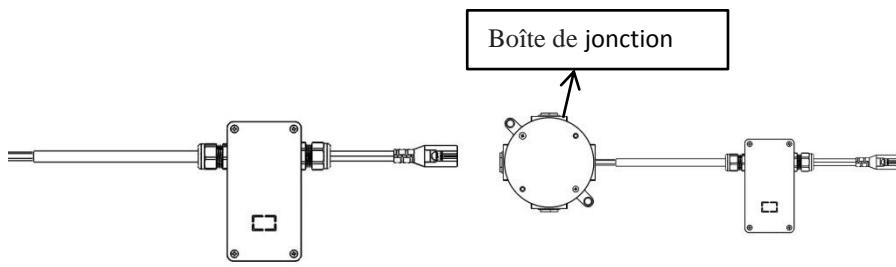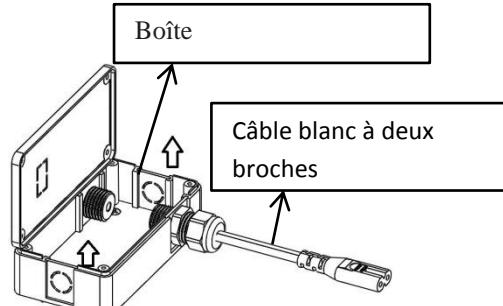

4

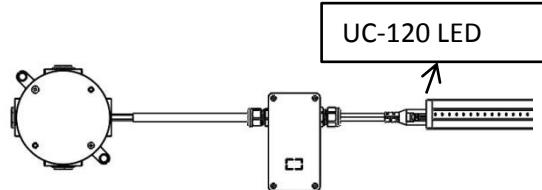

5

## DIRECTIVES DE CÂBLAGE

- Assurez-vous que la tension secteur est appropriée.
- Branchez le fil de **VERT** du luminaire au fil de **TERRE** de l'alimentation.
- Branchez le fil **BLANC** du luminaire au fil **NEUTRE** de l'alimentation.
- Branchez le fil **NOIR** du luminaire au fil **LIGNE** de l'alimentation